

QuickSpecs

Overview

HPE ProLiant ML310e Generation 8 (Gen8) v2

HPE ProLiant ML310e Gen8 v2, a single-socket 4U tower server, delivers essential availability and expansion needed to accommodate changing business needs. It is ideal for remote sites and corporate branch offices running file/print, web messaging, and small vertical applications or databases.

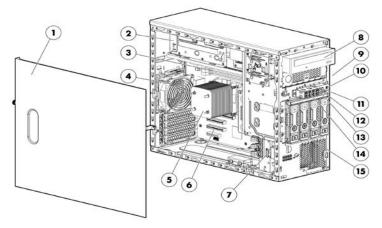



Front View:

- 1. Quick removal access panel
- 2. Power Supply
- 3. Four DIMM slots
- 4. Rear system fan (Processor cooling)
- 5. Processor Heatsink
- 6. Four (4) PCIe expansion slots
- 7. Front system fan (Expansion board cooling)
- 8. Half Height SATA DVD-ROM or DVD RW Optical Drive
- 9. Media Drive Blank
- 10. Power Button
- 11. NIC Activity LED
- 12. System Health
- 13. UID LED button
- 14. Four (4) USB connectors
- 15. Four (4) LFF or Eight (8) SFF SAS/SATA HDD cage

What's New

New HDD offering.

Rear View:

- 1. Power supply
- 2. NIC Connector 2
- 3. NIC Connector 1
- 4. UID LED Button
- 5. iLO Dedicated LAN Port
- 6. Two(2) USB 3.0 Connectors
- 7. Video Connector
- 8. Serial Connector
- 9. Slot 4 PCle x16
- 10. Slot 3 PCIe x8
- 11. Slot 2 PCIe x8
- 12. Slot 1 PCIe x4
- 13. PCIe card bracket



NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

Processor	Entry Processors				
One of the following depending on model	NOTE: All support up to 1333MT/s DDR3 memory speeds.				
	Intel® Pentium® G3220 (3.0GHz/2-core/3MB/54W)				
	Intel® Pentium® G3240 (3.1GHz/2-core/3MB/54W)				
	Base Processors				
	NOTE: All support up to 1600MT/s DDR3 memory speeds.				
	Intel® CoreTM i3-4130 (3.4GHz/2-core/3MB/54W, HT)				
	Intel® CoreTM i3-4130T (2.9GHz/2-core/3MB/35W, HT)				
	Intel® CoreTM i3-4150 (3.5GHz/2-core/3MB/54W, HT)				
	Intel® CoreTM i3-4150T (3.0GHz/2-core/3MB/35W, HT)				
	Performance Processors NOTE: All support up to 1600MT/s DDR3 memory speeds.				
	Intel® Xeon® E3-1230Lv3 (1.8GHz/4-core/8MB/25W, HT)				
	Intel® Xeon® E3-1220v3 (3.1GHz/4-core/8MB/80W)				
	Intel® Xeon® E3-1230v3 (3.3GHz/4-core/8MB/80W, HT)				
	Intel® Xeon® E3-1231v3 (3.4GHz/4-core/8MB/80W, HT)				
	Intel® Xeon® E3-1241v3 (3.5GHz/4-core/8MB/80W, HT)				
	Intel® Xeon® E3-1271v3 (3.6GHz/4-core/8MB/80W, HT)				
Cache Memory One of the following	8MB (1 x 8MB) L3 Cache NOTE: For Quad-core Xeon processors.				
depending on model	3MB (1 x 3MB) L3 Cache NOTE: For Dual-core Pentium® Core™ i3 processors.				
Chipset	Intel® C222 Chipset				
	NOTE: For more information regarding Intel [®] chipsets, please see the following URL: <u>http://www.intel.com/products/server/chipsets/</u> .				
Upgradeability	Upgradeable to 4 cores				
	NOTE: Total 2 or 4 cores				
	Up to 4 DIMM slots available for higher memory capacity				
	Up to 8 SFF Hard Drive Bays; Or 4 LFF Hard Drive Bays				
	1 x8 and 1 x16 PCIe 3.0 and 1 x8 and 1x4 PCIe 2.0 I/O slots for additional communications and storage expansion				
	Redundant Power Supply				
	Optical Drive Bay (up to 2)				
On System Managemei	nt HPE iLO (Firmware: HPE iLO4)				

Memory Protection ECC

Memory	Туре	HPE SmartMemory	
One of the following		DDR3 Unbuffered (UDIMM)	
depending on model	DIMM Slots Available	4	
	Maximum Capacity (UDIMM)	32 GB (4 x 8 GB UDIMM)	
	NOTE: HPE memory from previous generation servers are not fully compatible with the HPE ProLiant ML310e Gen8 v2 Server.		
	NOTE: Depending on the memory configuration and processor model, the memory speed may run at 1600MT/s or 1333MT/s. Please see Memory Population Table or the Online Memory Configuration Tool at: <u>http://www.hp.com/go/ddr3memory-configurator</u> .		
Network Controller	HPE Ethernet 1Gb 2-poi	rt 332i Adapter	

Expansion Slots

Expansion Slot #	Technology	Bus Width*	Connector Width	Form Factor	Notes
4	PCIe 3.0	X8	X16	Full Length/Full Height	
3	PCIe 3.0	X8	X8	Full Length/Full Height	
2	PCIe 2.0	X1	x8	Full Length/Full Height	
1	PCle 2.0	X1	Х4	Half Length/Full Height	
*Indicates the n	umber of physica	l electrical lanes	running to the	connector.	

HPE Server ROM

HPE ROM (Read Only Memory) is now digitally signed using Hewlett Packard Enterprise's Corporate Signing Service. This signature is verified before the flash process starts, reducing accidental programming and preventing malicious efforts to corrupt system ROM.

HPE ROM provides for essential initialization and validation of hardware components before control is passed to the customer-installed operating system. The ROM also provides the capability of booting from various fixed media (HDD, CD-ROM) and removable media (USB), to continue operation to the operating system.

HPE ROM performs very early configuration of the video controller, to allow monitoring of initialization progress via an attached monitor. If configuration or hardware errors are discovered during this early phase of hardware initialization, suitable messages are now displayed on the connected monitor. Additionally, these configuration or hardware errors are logged to the Integrated Management Log (IML) to assist in diagnosis.

Hewlett Packard Enterprise's ProLiant ROM is used to configure the following:

- Processor and chipset status registers
- System memory, memory map, and memory initialization
- System hardware configuration (Integrated PCI devices and optional PCIe cards).

• Customer-specific BIOS configuration (using the HPE ROM-Based Setup Utility (RBSU).

NOTE: For further information, please refer to Hewlett Packard Enterprise's RBSU (ROM based setup utility) user guide: <u>http://www.hp.com/support/rbsu</u>.

Controller NC NC mu NC NC	DTE: Supports RAID 0/1/10 on Ist be configured. DTE: For set up instructions, p D TE: For general information a	ATA. (SATA po ly. No FBWC sup lease refer to th about HPE Smar	rt 0/1 support 6Gb/s and SATA port 2/3 support 3Gb/s) port. For FBWC, a standup Smart Array Controller card e HPE ProLiant ML300 series server user guide. t Array B120i SATA RAID Controller, please go to: /proliantstorage/arraycontrollers/dynamicsmartarray/	
Internal Storage Devi	ices Optical Drives	HPE Half-Heigl	nt SATA DVD-ROM Optical Drive	
	One of the following depending on model	HPE Half-Heigl	nt SATA DVD-RW Optical Drive	
	Hard Drives	1x500GB HPE L	_FF SATA HDD included in Performance Model	
	Hard Drive Bays	4 LFF drive bay	rs (non-hot-plug and hot-plug)	
	One of the following	8 SFF hot-plug	drive bays	
	depending on model	versions in CTC NOTE: All Pre- blanks installed blanks, they ca	configured Models come populated with some hard drive d. Should the customer need additional hard drive in order more using either P/N 666987-B21: HPE SFF ve Blank Kit or P/N 666986-B21: HPE LFF Gen8 Hard	
Maximum Internal	Hot Plug LFF SAS	16TB	4 x 4TB	
Storage	Hot Plug SFF SAS	9.6TB	8x 1.2TB	
One of the following	Non Hot Plug LFF SAS	2.4TB	4 x 600GB	
depending on model	Hot Plug LFF SATA	16TB	4 x 4TB	
	Hot Plug SFF SATA	8TB	8 x 1TB	
	Non Hot Plug LFF SATA	12TB	4 x 3TB	
	Hot Plug SFF SAS SSD	3.2TB	8 x 400GB	
	Hot Plug SFF SATA SSD	6.4TB	8 x 800GB	
	Hot Plug LFF SATA SSD	3.2TB	4 x 800GB	
Interfaces	Serial	1(rear)		
	Video	1 (rear)		
	Network RJ-45 (Ethernet)	t)2 (1 shared for HPE Integrated Lights-Out)		
	HPE iLO Remote Management Network Port	1 Gb Dedicated		
	Micro SD slot	1 (internal) NOTE: The Mi d	cro SD slot is not a hot-pluggable device. Customers	

Standard Features	5	
		should not attempt to plug a Micro SD card into the Micro SD slot while the server is powered.
	USB	8 (4 front, 2 rear(USB3.0), 1 internal standard USB and 1 internal USB header)
		NOTE: RHEL 5.9 OS would not be supporting USB3.0
Industry Standard	ACPI 2.0b Compliant	
Compliance	PCIe 3.0 Compliant	
	PXE Support	
	WOL Support	
	Microsoft® Logo certifica	tions
	USB 2.0 /3.0 Support	
Server Power Cords	NEMA power cord that a additional local power co sku. To install the ML310	en8 v2 server is a tower server that ships standard with a 6' country specific llows connection to wall outlets in a home or office. If customers require rds, they can check the power cord matrix for the appropriate country specific e Gen8 v2 server in a rack, the Tower to Rack Conversion kit (417705-B21) is J power cord (416151-B21) to connect to a PDU in a data center rack.
Power SpecificationsTo review typical system power requirements, use the HPE download at URL: http://www.hp.com/go/proliant-energy http://www.hp.com/go/hppoweradvisor.		
		ion and Technical Content for supported power supplies can be found at: 20195/v2/GetHTML.aspx?docname=c04111541
Power Supplies		oports two power supplies, a 350W Multi-Output Power Supply and a 460W r Supply. The 350W Multi-Output Power Supply is a non-redundant power rating of 85%.
	range of ProLiant and Int the highest power supply are tested by the Electric power supply program. T	CS) power supplies allow for commonality of power supplies across a wide egrity servers, as well as HPE Storage solutions, and are designed to provide refficiency without degrading system performance. HPE CS power supplies Power Research Institute (EPRI) and certified through the ECOS 80 Plus he 460W HPE CS power supply option provides an efficiency rating of up to ot power sources are UL, CE Mark Compliant, hot-plug and support redundant
		supplies in the same server is not supported. All power supplies must be efficiency rating. If non-matched power supplies are inserted you will get I fail.
		that you use the HPE Power Advisor in defining the "Right-Size" power PE Power Advisor can be accessed at: //hppoweradvisor.
	industry, and consumers	ogram is a unique forum that unites electric utilities, the computer s in an effort to bring energy efficient technology solutions to the dependently tests power supply efficiency and publicly posts the results
		Page

Standard Features			
	on http://www.80plus .	.org.	
		nal (1 + 1 redundant) power supplies can be purchased through power supply upplies for part numbers).	
	-	tion and Technical Content for supported power supplies can be found at: h20195/v2/GetHTML.aspx?docname=c04111541	
System Fans	One (1) Non-redundant system fan ships standard One (1) Non-redundant PCIe fan ships standard		
Operating Systems and Virtualization Software Support for ProLiant Servers	Canonical Ubuntu Red Hat Enterprise Lin SUSE Linux Enterprise VMware NOTE: For more inform Virtualization Software our Support Matrix at:	ux (RHEL)	
Graphics	Integrated Matrox G200 • 1280 x 1024 (32 • 1920 x 1200 (16 HPE iLO 4 On System M	2 bpp) bpp)	
	 16 MB Flash 256 MB DDR 3 v 	with ECC (112 MB after ECC and video)	
Form Factor One of the following depending on model	8 SFF Drive Bay Cage: 4.6" (11.72cm) Height x 5 4 LFF Drive Bay Cage:	chassis with feet/bezel: 6.89" (17.5cm) Width x 18.71" (47.52cm) Length 6.74" (14.57cm) Width x 4.79" (12.16cm) Length 6.74" (14.57cm) Width x 6.90" (17.54cm) Length	
On System Management	HPE iLO Management Engine	HPE iLO Management Engine is a comprehensive set of embedded management features supporting the complete lifecycle of the server, from initial deployment, through ongoing management, to service alerting and remote support. HPE iLO Management Engine comes standard on all HPE ProLiant Gen8 servers. The HPE iLO Management Engine portfolio includes:	
		• HPE iLO: The HPE iLO (Integrated Lights-Out) management	

• **HPE iLO:** The HPE iLO (Integrated Lights-Out) management processor is the core foundation for the HPE iLO Management Engine

- **HPE Agentless Management:** Provides built in server health monitoring and alerting capability without OS agents, that starts working the moment a power cord and an Ethernet cable are connected.
- HPE Active Health System: Always on, continuous monitoring for increased stability and shorter downtimes; 100% configuration history; Health and service alerts and easy export and upload to Service and Support.
- **HPE Intelligent Provisioning:** Lets customers provision and configure a single server without any separate media. No more SmartStart CDs or Smart Update Firmware DVD are needed.
 - To start Intelligent Provisioning:
 - Press the F10 key during the ProLiant Gen8 server boot process (also known as power on selftest or POST).
 - Please go to the Intelligent Provisioning website at

http://www.hp.com/go/intelligentprovisionin g for additional information and to view usage videos.

- Use the Service Pack for ProLiant (SPP) at <u>http://www.hp.com/go/spp</u> to get firmware and software updates.
- **HPE iLO Mobile App:** Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <u>http://www.hp.com/go/ilo/mobileapp</u>

NOTE: For more information, visit: <u>http://www.hp.com/go/ilo</u> or HPE iLO Management Engine technologies whitepaper.

HPE Insight Management	HPE Service Pack for ProLiant (SPP)	HPE Service Pack for ProLiant (SPP) and HPE Smart Update Manager (HPE SUM) provide a comprehensive approach to firmware and system software maintenance. Together they provide better operating stability and ensure maximum uptime. The SPP will be updated at a predictable cadence, typically coinciding with new HPE server hardware launches. By enabling firmware to be updated online and integrating firmware and system software updates in one operation, HPE SUM and the SPP offer faster updates of individual servers and dramatically faster updates of entire BladeSystem enclosures. Further improving system uptime and stability is the fact that Hewlett Packard Enterprise provides 12 months of support for each Service Pack for ProLiant release.
		The user experience around HPE SUM and the SPP has been improved in several ways, starting with the web download. A single web page provides access to a single download containing both the latest version of HPE SUM and the latest SPP. Optional smaller subsets with only specific types of servers or specific operating systems are offered to save on download time. The HPE SUM application provides a straightforward, intuitive user interface that guides the user through the steps of discovery, analyses and

update, providing comprehensive information on available updates, criticality and interdependencies. This information is also available in reports. By providing the option of multiple local or shared repositories which can be easily updated from hpe.com, HPE SUM provides the tools to optimize stability and consistency throughout the company. While HPE SUM and the SPP recommend the combinations of firmware and system software that Hewlett Packard Enterprise has found to be the best practice, the application gives customers the flexibility to set their own specific baseline.

The Service Pack for ProLiant has been rigorously tested with specific attention for interaction between firmware, drivers and agents both within the server as well as in interaction with the BladeSystem enclosure components (Onboard Administrator and Virtual Connect). This testing ensures the highest quality as well as providing the input for HPE SUM to deploy updates taking into account all interdependencies, when determining the correct updates and order of update deployment.

NOTE: The Service Pack for ProLiant (which includes HPE SUM) can be downloaded from <u>http://www.hp.com/go/spp/download</u>. More information can be found: <u>http://www.hp.com/go/SmartUpdate</u>, <u>http://www.hp.com/go/spp</u> and <u>http://www.hp.com/go/hpsum</u>

Security	Power-on password Administrator's password
Warranty	This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details. NOTE: Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. (3-1-1 warranty offered in Brazil only). Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html

Optional Features

HPE Insight Management	HPE Insight Control	HPE Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. HPE Insight Control also supports Location and Power Discovery Services to automate many configuration, asset tracking, and power management tasks to speed implementation and prevent downtime. For more information, see http://www.hp.com/go/insightcontrol .
		HPE Insight Control includes one year of 24 x 7 HPE Software Technical Support and Update Service ensuring rapid access to Hewlett Packard Enterprise support staff and proactive delivery of software updates. For more information about this service, see: http://www.hp.com/services/insight.
	HPE iLO Advanced	HPE Integrated Lights-Out Advanced License a product option, providing smart remote server management without compromise. iLO Advanced unlocks the full set of remote administration functionality for all HPE ProLiant servers by activating the full Virtual Keyboard Video and Mouse remote console, multi-user collaboration, console record and replay, GUI-based and scripted virtual media and virtual folders, and enhanced security and power management functionality. For more information, see: http://www.hp.com/go/iloadvance
	HPE iLO Essentials	HPE iLO Essentials license ideal for small and medium business customers. The specially created HPE iLO Essentials (a subset of iLO Advanced functionality) saves SMB customers time and money, by ease of remote server set up through the interactive virtual media, lowering operational costs with remote access via the Integrated Remote Console, and faster time to resolution with email-based proactive notifications. With this newly designed HPE iLO Essentials license SMB customers now have the option of a server management package solely design and priced just right for their IT environments. HPE iLO Essentials is available on all HPE ProLiant Gen8 e-series making this an ideal solution for small business owners. For more information, see: <u>http://www.hp.com/go/iLO/essentials</u>

Storage Software

Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HPE storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.

Storage software that gets the job done:

• Data Protection and Recovery Software

Whether you're a large enterprise or a smaller business, HPE data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.

• Data Archive and Migration Software

The HPE storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.

Optional Features	
	 Storage Resource Management Software (SRM) The HPE storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments. Data Replication Software Hewlett Packard Enterprise offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting. Storage Device Management Software Maximize your investment in HPE storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management. HPE StoreVirtual VSA With HPE StoreVirtual VSA you can use the power of virtualization to turn a set of heterogeneous and disconnected physical disk drives in your servers and storage devices into a single pool of logical storage capacity. NOTE: For more information available Storage Software including QuickSpecs, please see: http://www.hp.com/go/storage/software.
HPE Insight Online	HPE Insight Online is a new addition to the HPE Support Center for one stop, secure access to product and Hewlett Packard Enterprise support information personalized to your IT environment. Insight Online can automatically display devices remotely monitored by HPE Insight Remote Support. With Insight Online's easy navigation you can efficiently track your IT support contracts and device status from anywhere and at any time. <u>http://www.hp.com/go/insightonline</u>
Factory Express Portfolio for Servers and Storage	 HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed. Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. Hewlett Packard Enterprise products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches. For more information on Factory Express services for your specific server model please contact your sales representative or go to: http://www.hp.com/go/factory-express
HPE Enterprise Configurator	The HPE eConfigure Enterprise Configurator now provides factory default racking for our Hewlett Packard Enterprise hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact the HPE Customer Business Center or an Authorized Partner for assistance. For additional information please visit: http://www.hp.com/products/configurator

Service and Support

Related Services	HPE ProLiant Server Hardware Installation
Get connected to Hewlett Packard Enterprise to improve your support experience	Prevent problems with innovative, automated monitoring tools and proactive services. Combining Proactive Care Services with our remote support technology such as Insight Online provides you with expert advice and personalized, cloud-based automated IT support, helping to prevent unplanned down time and solve problems quickly. For more information, visit: http://www.hp.com/go/proactiveinsightexperience
	HPE Foundation Care Next Business Day connects you to Hewlett Packard Enterprise during business hours for assistance on resolving issues – features next business day hardware onsite response if needed and software call back within two hours. Collaborative software support is included and provides troubleshooting assistance on industry leading software running on your server. Simplify your support experience and make Hewlett Packard Enterprise your first call for hardware or software questions. http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en
Basic Care	Delivers minimum recommended support service level Foundation Care NBD, three-year Care Pack Service
Standard Care	Supports maintaining high level of server availability Foundation Care 24x7, three-year Care Pack Service HPE Foundation Care 24x7 connects you to Hewlett Packard Enterprise 24 hours a day, seven days a week for assistance on resolving issues. Hardware onsite response within four hours if needed; collaborative software included in this Care Pack service provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call for hardware or software questions. http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en
	HPE Proactive Care with 24x7 coverage, three year Care Pack Service HPE Proactive Care helps prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to Hewlett Packard Enterprise. This Care Pack Service combines three years' proactive reporting and advice with our 24x7 coverage and enhanced escalation management, four hour hardware response time and two hour call back for software questions on leading industry standard software running on your HPE ProLiant server. <u>http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf</u>
Optimized Care	Supports maintaining servers at optimum performance availability
	Protect your business beyond warranty with HPE Care Pack Services HPE Care Pack Services enable you to order the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement for the term you select.
Service and Support	HPE Technology Services for Industry Standard Servers HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to Hewlett Packard Enterprise to help prevent problems and solve issues faster. Our support technology lets you to tap into the knowledge of millions of devices and thousands of experts to stay informed and in control, anywhere, any time.

Service and Support

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner. http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf

Factory Express for Servers and storage

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed. For more information on Factory Express services for your specific server model please contact your sales representative or go to: http://www.hp.com/go/factory-express.

Data Privacy Services

Protect your data through better media management. HPE Data privacy services help manage and protect sensitive data to reduce the risk of unauthorized access to private information and help meet compliance requirements. Our retention services allow you to keep drives and other devices upon failure, our removal services provide convenient data sanitization and our recovery services allow you to safely retire IT assets and capture any remaining value from the hardware.

http://www.hp.com/services/dataprivacy

Additional HPE Care Pack services can be found at: http://www.hp.com/go/cpc

HPE Support Center	Personalized online support portal with access to information, tools and experts to support Hewlett Packard Enterprise business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers. Learn more http://www.hp.com/go/hpsc The HPE Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime. HPE Insight Remote Support and HPE Support Center are available at no additional cost with a Hewlett Packard Enterprise warranty, HPE Care Pack or Hewlett Packard Enterprise contractual support agreement. NOTE: *HPE Support Center Mobile App is subject to local availability
Parts and Materials	Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.
	Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.
	The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.
For more information	To learn more on HPE ProLiant servers and HPE BladeSystem servers, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner. Or visit: http://www.hp.com/services/proliant

Pre-configured Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

NOTE: Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

NOTE: Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

NOTE: If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

NOTE: Maximum speed supported depends on the CPU installed.

Please see Memory Population Table or the Online Memory Configuration Tool at: <u>http://www.hp.com/go/ddr3memory-</u> configurator.

NOTE: All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 666987-B21: HPE SFF Gen8 Hard Drive Blank Kit or P/N 666986-B21: HPE LFF Gen8 Hard Drive Blank Kit.

NOTE: Not all models are available in all regions. Check with your local country Hewlett Packard Enterprise offices for availability.

Entry Models

HP ProLiant ML310e	Processor(s)	(1) Intel® CoreTM i3-4150 (3.5GHz/2-core/3MB/54W, HT) Processor
Gen8 v2 i3-4150 1P 2GB-	Cache Memory	3MB (1 x 3MB) L3 cache
U B120i Non-hot Plug 350W PS Entry Server	Memory	2GB (1 x 2GB) PC3-12800E DDR3 UDIMM
768748-xx1	Network Controller	HPE Ethernet 1Gb 2-port 332i Adapter
	Storage Controller	HPE Dynamic Smart Array B120i Controller
	Hard Drive	None
	Internal Storage	4 LFF SAS/SATA Non Hot Plug HDD cage; includes 4 LFF hard drive blanks
	Optical Drive	None
	Power Supply	HPE 350W Multi-Output Power Supply
	Fans	One (1) Non-redundant system fan ships standard One (1) Non-redundant PCIe fan ships standard
	Management	HPE iLO Management Engine (standard on system NIC) Optional: HPE iLO Essentials or HPE Insight Control
	Form Factor	Micro ATX Tower (4U)
	Warranty	Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response (3-1-1 warranty offered in Brazil only).

Base Models

HP ProLiant ML310e	Processor(s)	(1) Intel® Xeon® E3-1220v3 (3.1GHz/4-core/8MB/80W) Processor
Gen8 v2 E3-1220v3 1P	Cache Memory	8MB (1 x 8MB) L3 cache
4GB-U B120i 350W PS Svr	Memory	4GB (1 x 4GB) PC3-12800E DDR3 UDIMM
SVF 712329-xx1	Network Controller	HPE Ethernet 1Gb 2-port 332i Adapter
	Storage Controller	HPE Dynamic Smart Array B120i Controller
	Hard Drive	None

Pre-configured Models

Internal Storage	4 LFF SAS/SATA Hot Plug HDD cage; includes 4 LFF hard drive blanks
Optical Drive	HPE Half-Height 16x SATA DVD-RW
Power Supply	HPE 350W Multi-Output Power Supply
Fans	One (1) Non-redundant system fan ships standard One (1) Non-redundant PCIe fan ships standard
Management	HPE iLO Management Engine (standard on system NIC) Optional: HPE iLO Essentials or HPE Insight Control
Form Factor	Micro ATX Tower (4U)
Warranty	Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response (3-1-1 warranty offered in Brazil only).

Performance Models

HP ProLiant ML310e	Processor(s)	(1) Intel® Xeon® E3-1241v3 (3.4GHz/4-core/8MB/80W) Processor
Gen8 v2 E3-1241v3 1P	Cache Memory	8MB (1 x 8MB) L3 cache
8GB-U B120i 460W PS Performance Server 768729-xx1	Memory	8GB (1 x 8GB) PC3-12800E DDR3 UDIMM
	Network Controller	HPE Ethernet 1Gb 2-port 332i Adapter
	Storage Controller	HPE Dynamic Smart Array B120i Controller
	Hard Drive	1x500GB HPE LFF SATA
	Internal Storage	4 LFF SAS/SATA Hot Plug HDD cage; includes 3 LFF hard drive blanks
	Optical Drive	HPE Half-Height 16x SATA DVD-RW
	Power Supply	HPE 460W Common Slot Gold Hot Plug Power Supply
	Fans	One (1) Non-redundant system fan ships standard One (1) Non-redundant PCIe fan ships standard
	Management	HPE iLO Management Engine (standard on system NIC) Optional: HPE iLO Essentials or HPE Insight Control
	Energy Star	Meets Energy Star requirements
	Form Factor	Micro ATX Tower (4U)
	Warranty	Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response (3-1-1 warranty offered in Brazil only).

Country Code Key

Tower Code Key

xx=00	US
xx=01	Australia
xx=03	UK
xx=04	Germany
xx=05	France
xx=37	APD
xx=42	Europe
xx=AA	PRC

Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for information on configurable product offerings and requirements. **NOTE:** Factory Integrated Models must start with a CTO Server.

NOTE: FIO indicates that this option is only available as a factory installable option.

NOTE: All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.

Step 1: Base Configuration (choose one of the following configurable models)

HPE Models	HP ProLiant ML310e Gen8 v2 Non-hot Plug 4 LFF Configure-to-order Server	722445-B21
	Factory Integrated Model ships with:	
	HPE Ethernet 1Gb 2-port 332i Adapter	
	HPE iLO Management Engine (standard on shared system NIC)	
	HPE Dynamic Smart Array B120i Controller (RAID 0/1/10)	
	4 ports for HDD NOTE: For set up instructions for HPE Dynamic Smart Array B120i Controller	
	please refer to the HPE ProLiant ML300 series server user guide.	
	NOTE: For general information about HPE Dynamic Smart Array B120i	
	Controller, please visit: http://www.hp.com/go/dynamicsa	
	Non Hot-Plug SAS/SATA 4 port cable	
	PCA Power Cord	
	Micro ATX Tower (4U)	
	HP ProLiant ML310e Gen8 v2 Hot Plug 4 LFF Configure-to-order Server	722446-B21
	Factory Integrated Model ships with:	
	HPE Ethernet 1Gb 2-port 332i Adapter	
	HPE iLO Management Engine (standard on shared system NIC)	
	HPE Dynamic Smart Array B120i Controller (RAID 0/1/10)	
	4 ports for HDD NOTE: For set up instructions for HPE Dynamic Smart Array B120i Controller	
	please refer to the HPE ProLiant ML300 series server user guide.	
	NOTE: For general information about HPE Dynamic Smart Array B120i	
	Controller, please visit: http://www.hp.com/go/dynamicsa	
	Hot-Plug SAS/SATA 4 port cable	
	PCA Power Cord	
	Micro ATX Tower (4U)	
	HP ProLiant ML310e Gen8 v2 Hot Plug 8 SFF Configure-to-order Server	722447-B21
	Factory Integrated Model ships with:	
	HPE Ethernet 1Gb 2-port 332i Adapter	
	HPE iLO Management Engine (standard on shared system NIC)	
	Standup HPE Smart Array Controller or Host Bus Adapter required PCA Power Cord	
	PCA Power Cord Micro ATX Tower (4U)	

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

Configuration Information - Factory Integrated Models

HPE Processors	Entry Processors NOTE: All support up to 1333MT/s DDR3 memory speeds.	
	HP ML310e Gen8 v2 Intel® Pentium® G3240 (3.1GHz/2-core/3MB/54W) FIO Processor Kit	767102-L21
	Base Processors	
	NOTE: All support up to 1600MT/s DDR3 memory speeds.	
	HP ML310e Gen8 v2 Intel® Core™ i3-4150 (3.5GHz/2-core/3MB/54W) FIO Processor Kit	767100-L21
	HP ML310e Gen8 v2 Intel® Core™ i3-4150T (3GHz/2-core/3MB/35W) FIO Processor Kit	767101-L21
	Performance Processors	
	NOTE: All support up to 1600MT/s DDR3 memory speeds.	
	HP ML310e Gen8 v2 Intel® Xeon® E3-1230Lv3 (1.8GHz/4-core/8MB/25W) FIO Processor Kit	740649-L21
	HP ML310e Gen8 v2 Intel® Xeon® E3-1220v3 (3.1GHz/4-core/8MB/80W) FIO Processor Kit	723935-L21
	HP ML310e Gen8 v2 Intel® Xeon® E3-1231v3 (3.4GHz/4-core/8MB/80W) FIO Processor Kit	767097-L21
	HP ML310e Gen8 v2 Intel® Xeon® E3-1241v3 (3.5GHz/4-core/8MB/80W) FIO Processor Kit	767098-L21
	HP ML310e Gen8 v2 Intel® Xeon® E3-1271v3 (3.6GHz/4-core/8MB/80W) FIO Processor Kit	767099-L21
HPE Memory	Unbuffered with ECC DIMMs (UDIMMs)	
	HP 2GB (1x2GB) Single Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669320-B21
	HP 2GB (1x2GB) Single Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647905-B21
	HP 2GB (1x2GB) Single Rank x8 PC3L-12800E (DDR3-1600) Unbuffered CAS-11 Low Voltage Memory Kit	713975-B21
	HP 4GB (1x4GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669322-B21
	HP 4GB (1x4GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647907-B21
	HP 4GB (1x4GB) Dual Rank x8 PC3L-12800E (DDR3-1600) Unbuffered CAS-11 Low Voltage Memory Kit	713977-B21
	HP 8GB (1x8GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669324-B21
	HP 8GB (1x8GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647909-B21
	HP 8GB (1x8GB) Dual Rank x8 PC3L-12800E (DDR3-1600) Unbuffered CAS-11 Low Voltage Memory Kit	713979-B21
	HP 4GB (1x4GB) Single Rank x4 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	820077-B21
	NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: <u>http://www.hp.com/go/ddr3memory-configurator</u> .	

Configuration Information - Factory Integrated Models

HPE Power Supplies	 NOTE: Mixing of power supplies in the same server is not supported. All power supplies inside a server must be exactly the same model. Mixing Gold, Platinum, and Platinum Plus certified power supplies is not supported. NOTE: Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: http://www.hp.com/go/hppoweradvisor 	
	HP 350W Factory Integrated Power Supply Kit	674838-B21
	HPE Common Slot Gold Power Supplies	
	NOTE: The following Power Supplies offer 92% Efficiency.	
	HP 460W CS Gold Ht Plg Power Supply Kit	503296-B21
	Enablement Kit	
	HP 4U Redundant Power Supply Enablement Kit NOTE: The HPE 4U Redundant Power Supply Enablement Kit (675843-B21) must be installed when using HPE Common Slot power supplies.	675843-B21
Step 3: Choose Ad	ditional Factory Integratable Options	
HPE Insight Software	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License	C6N36A
	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle FIO Electronic License	C6N36ABE
	NOTE: The Electronic software license is available in EMEA only.	

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below.

HPE Unique Options	HP 4U 4 Large Form Factor Hot Plug Hard Drive Backplane Kit NOTE: The LFF Kit is a backplane kit designed for going from NHP LFF to hot- plug LFF.	674839-B2 [°]
	HP 4U 8 Small Form Factor Hot Plug Hard Drive Cage Kit NOTE: The SFF Kit is the cage plus backplane and designed to convert from any LFF configuration to SFF.	674841-B21
HPE Memory	NOTE: To realize the performance memory capabilities listed in this document, HPE SmartMemory is required. For additional information, please see the HPE SmartMemory QuickSpecs . NOTE: HPE memory from previous generation servers are not fully compatible with SmartMemory features in Gen8 Servers.	
	Unbuffered with ECC DIMMs (UDIMMs)	
	HP 2GB (1x2GB) Single Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669320-B21
	HP 2GB (1x2GB) Single Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647905-B21
	HP 2GB (1x2GB) Single Rank x8 PC3L-12800E (DDR3-1600) Unbuffered CAS-11 Low Voltage Memory Kit	713975-B21
	HP 4GB (1x4GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669322-B21
	HP 4GB (1x4GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647907-B21
	HP 4GB (1x4GB) Dual Rank x8 PC3L-12800E (DDR3-1600) Unbuffered CAS-11 Low Voltage Memory Kit	713977-B21
	HP 8GB (1x8GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669324-B21
	HP 8GB (1x8GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647909-B21
	HP 8GB (1x8GB) Dual Rank x8 PC3L-12800E (DDR3-1600) Unbuffered CAS-11 Low Voltage Memory Kit	713979-B21
	HP 4GB (1x4GB) Single Rank x4 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	820077-B21
HPE Drive Cage Options	HP 4U 4 Large Form Factor Hot Plug Hard Drive Backplane Kit NOTE: The LFF Kit is a backplane kit designed for going from NHP LFF to hot- plug LFF.	674839-B21
	HP 4U 8 Small Form Factor Hot Plug Hard Drive Cage Kit NOTE: The SFF Kit is the cage plus backplane and designed to convert from any LFF configuration to SFF.	674841-B21
HPE Optical Drives	HP Half-Height SATA DVD ROM JackBlack Optical Drive	624189-B21

	HP Half-Height SATA DVD RW JackBlack Optical Drive	624192-B21
HPE Hard Drives	NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.	
	NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.	
	12G SAS Hot Plug with SmartDrive SFF (2.5-inch) Enterprise Drives	
	HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759212-B2
	HP 450GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759210-B2
	HP 300GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759208-B2
	12G SAS Hot Plug SmartDrive LFF (3.5-inch) Converter Enterprise Drives	
	HP 600GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	765424-B2
	HP 450GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	737394-B2
	HP 300GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	737261-B2
	12G SAS Hot Plug SFF (2.5-inch) Enterprise Drives	
	HP 1.2TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	781518-B2
	HP 900GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	785069-B2
	HP 600GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	781516-B2
	HP 300GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	785067-B2
	12G SAS Hot Plug SFF (2.5-inch) SC 512e Drives	
	HP 2TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765466-B2
	HP 1TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765464-B2
	HP 1.8TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 512e 3yr Warranty Hard Drive	791034-B2
	HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC 512e Enterprise 3yr Warranty Hard Drive	748387-B2
	HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive	793699-B2
	12G SAS Hot Plug LFF (3.5-inch) Midline (MDL) 512e Drives	
	HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765259-B2
	HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765255-B2
	HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765257-B2
	HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765253-B2
	12G SAS Hot Plug LFF (3.5-inch) SC 512e Performance Drives	
	HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive	793671-B2
	HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive	793669-B2
	12G SAS Hot Plug LFF (3.5in) 7.2K MDL SC HDD	
	HPE 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	818367-B2
		Page

HPE 2TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	818365-B21
6G SAS Hot Plug with SmartDrive SFF (2.5-inch) Enterprise Drives	
HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive	718162-B21
HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652589-B21
HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652583-B21
HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652572-B21
HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652564-B21
HP 300GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652611-B21
HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652605-B21
6G SAS Hot Plug SmartDrive SFF (2.5-inch) Midline Drives	
HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	652749-B21
HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	652745-B21
6G SAS Hot Plug SmartDrive LFF (3.5-inch) Midline Drives	
HP 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	761477-B21
HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	695510-B21
HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652766-B21
HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652757-B21
HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652753-B21
12G SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives	
HPE 1TB 12G SAS 7.2K rpm SFF (2.5in) SC Midline 1yr Warranty Hard Drive	832514-B21
12G SAS SFF (2.5in) RI-3 SC Solid State Drives	
HPE 3.84TB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816576-B21
HPE 1.92TB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816572-B21
HPE 960GB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816568-B21
HPE 480GB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816562-B21
12G SAS SFF (2.5in) MU-3 SC Solid State Drives	
HPE 3.2TB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	822567-B21
HPE 1.6TB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	822563-B21
HPE 800GB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	822559-B21
HPE 400GB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	822555-B21
NOTE: Please see the QuickSpecs for Technical Specifications and additional	
information:	
http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111744	
6G SATA 2.5in SFF RI-3 SC Solid State Drives	
HP 3.84TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816929-B21
HP 1.92TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816919-B21
HP 960GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816909-B21
HP 480GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816899-B21
	01/000 001

6G SATA 2.5in SFF MU-3 SC Solid State Drives

HP 240GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive

HP 120GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive

816889-B21

816879-B21

817015-B21 816999-B21 816989-B21 816979-B21 816969-B21 628065-B21 659339-B21 659337-B21 659341-B21
817015-B21 816999-B21 816989-B21 816979-B21 816969-B21 628065-B21 659339-B21
817015-B21 816999-B21 816989-B21 816979-B21 816969-B21 628065-B21
817015-B21 816999-B21 816989-B21 816979-B21 816969-B21 628065-B21
817015-B21 816999-B21 816989-B21 816979-B21 816969-B21
817015-B21 816999-B21 816989-B21 816979-B21
817015-B21 816999-B21 816989-B21 816979-B21
817015-B21 816999-B21 816989-B21
817015-B21 816999-B21
817015-B21
010003-021
816883-B21
816893-B21
816903-B21
816913-B21
816923-B21
816933-B21
658071-B21
657750-B21
658079-B21
628061-B21
693687-B21
753874-B21
793683-B21
655708-B21
655710-B21
816965-B21
816975-B21
816985-B21
816995-B21
817011-B21

Hard Drive	
6G SATA Hot Plug SFF (2.5-inch) SC 512e Drives	
HP 2TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765455-B2 ²
HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765453-B2 [°]
6G SATA Hot Plug LFF (3.5-inch) SC 512e Performance Drives	
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive	793667-B2 [°]
HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drives	793665-B2 ⁻
NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111725	
12G SAS Mainstream Endurance Hot Plug SFF (2.5-inch) Enterprise Mainstream H2 Solid State Drives	
HP 400GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive	779168-B2 ⁻
HP 200GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive	779164-B2 [°]
12G SAS Hot Plug SFF (2.5-inch) SC Write Intensive Solid State Drives	
HP 200GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	802578-B2
HP 400GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	802582-B2
HP 800GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	802586-B2
6G SATA Value Endurance Hot Plug SFF (2.5-inch) Enterprise Boot Solid State	
Drives	
HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive	717965-B2 ⁻
HP 80GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive	734360-B2
6G SATA 2.5in WI-PLP SCC SSD	
HP 1.2TB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804680-B2
HP 800GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804674-B2
HP 400GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804668-B2
HP 200GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804642-B2
HP 800GB 6G SATA Write Intensive-2 LFF 3.5-in LPC 3yr Wty Solid State Drive	831725-B2
6G SATA 2.5in MU-PLP SCC SSD	
HP 1.6TB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804634-B2
HP 800GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804628-B2
HP 480GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	832417-B2
HP 200GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804616-B2
6G SATA 2.5in RI-PLP SCC SSD	
HP 1.6TB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804608-B2
HP 800GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804602-B2
HP 480GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804596-B2

HP 240GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804590-B21
HP 120GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804584-B21
HP 80GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804578-B21
6G SATA 2.5in WI-PLP SC SSD	
HP 1.2TB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804677-B21
HP 800GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804671-B21
HP 400GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804665-B21
HP 200GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804639-B21
6G SATA 2.5in MU-PLP SC SSD	
HP 1.6TB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804631-B21
HP 800GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804625-B21
HP 480GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	832414-B21
HP 200GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804613-B21
6G SATA 2.5in RI-PLP SC SSD	
HP 1.6TB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804605-B21
HP 800GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804599-B21
HP 480GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804593-B21
HP 240GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804587-B21
HP 120GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804581-B21
HP 80GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804575-B21
6G SATA Value Endurance Hot Plug LFF (3.5-inch) Enterprise Boot Solid State	
Drives	
HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive	718171-B21
HP 80GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive	734362-B21
6G SATA Hot Plug Value Endurance LFF (3.5-inch) Converter Enterprise Value	
G1 Solid State Drives	
HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 Solid State Drive	756660-B21
6G SATA Hot Plug Value Endurance SFF (2.5-inch) Enterprise Value G1 Solid	
State Drives	
HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty G1 Solid State Drive	756657-B21
6G SATA Value Endurance Hot Plug SFF (2.5-inch) Enterprise Value Solid State	
Drives	
HP 1.6TB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	757339-B21
HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid	717973-B21
State Drive	/ II // 3 DZ1
	717971-B21

	State Drive	
	6G SATA Value Endurance Hot Plug LFF (3.5-inch) Enterprise Value Solid State	
	Drives	
	HP 1.6TB 6G SATA Value Endurance LFF 3.5-in SC Converter Enterprise Value 3yr Wty Solid State Drive	757342-B2
	HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	718189-B2
	HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	718183-B2
	HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	718177-B2
	6G SATA Value Endurance Hot Plug SFF (2.5-inch) Enterprise Value M1 Solid	
	State Drive	
	HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764929-B2 ⁻
	HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764927-B2
	HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764925-B2
	HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764923-B2
	6G SATA Hot Plug SFF (2.5-inch) SC Read Intensive Solid State Drives	
	HP 480GB 6G SATA Read Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	789145-B2
	6G SATA Hot Plug LFF (3.5-inch) SC Read Intensive Solid State Drives	
	HP 480GB 6G SATA Read Intensive LFF 3.5-in SC Converter 3yr Wty Solid State Drive	789147-B2
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04154378 Hard Drive Kits NOTE: All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server. NOTE: The part numbers for single HDD blanks below are provided should the customer require replacement HDD blanks for their server	
	HP Large Form Factor Hard Drive Blank Kit	666986-B2
	HP Small Form Factor Hard Drive Blank Kit	666987-B2
IPE Networking	Gigabit Ethernet adapters	
	HP NC365T 4-port Ethernet Server Adapter	593722-B2
	HP Ethernet 1Gb 4-port 331T Adapter	647594-B2
	HP Ethernet 1Gb 2-port 332T Adapter	615732-B2
	HP Ethernet 1Gb 2-port 361T Adapter	652497-B2
	10 Gigabit Ethernet adapters	
	HP NC523SFP 10Gb 2-port Server Adapter	593717-B2
	HP NC552SFP 10Gb 2-port Ethernet Server Adapter	614203-B2
		Page 2

Core Options		
	HP Ethernet 10Gb 2-port 560SFP+ Adapter NOTE: Please see the QuickSpecs for Technical Specifications and additional information: <u>http://www.hp.com/go/ProLiantNICs</u>	665249-B21
	Switches HP PS1810-24G Switch NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111385	J9834A
HPE Power Supplies	NOTE: Mixing of power supplies in the same server is not supported. All power supplies inside a server must be exactly the same model. Mixing Gold, Platinum, and Platinum Plus certified power supplies is not supported. NOTE: Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: http://www.hp.com/go/hppoweradvisor.	
	 HPE Common Slot Gold Power Supplies NOTE: The following Power Supplies offer 92% Efficiency. HP 460W CS Gold Ht Plg Power Supply Kit NOTE: Option Kits for AC power supplies include the power supply and one PDU IEC cable. NOTE: Power Specification and Technical Content for supported power supplies can be found at: http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111541 	503296-B21

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE Insight Software	HPE Insight Control	
	HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License	C6N27A
	HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License	C6N28ABE
	NOTE: The Electronic software license is available in EMEA only.	
	HP Insight Control Server Provisioning Media Kit	BD883A
	HP Insight Management Media Kit	C6N31A
	NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.	
	NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HPE Software Technical Support and Update Service.	
	NOTE: Licenses ship without media. The HPE Insight Control Media Kit can be	
	ordered separately, or can be downloaded at:	
	http://www.hp.com/go/insightupdates. NOTE: For additional license options please see the QuickSpecs at:	
	http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04123391	
	HPE Integrated Lights-Out (iLO)	
	HPE iLO Essentials	
	HP Integrated Lights-Out Essentials including 3yr 24x7 Technical Support and Updates E-LTU	E6U61ABE
	NOTE: The Electronic software license is available in EMEA only.	
	HP Integrated Lights-Out Essentials including 1yr 24x7 Technical Support and Updates E-LTU	E6U62ABE
	NOTE: The Electronic software license is available in EMEA only.	
	HP Integrated Lights-Out Essentials including 3yr 24x7 Tech Support and Updates Single Svr License	BD774A
	HP Integrated Lights-Out Essentials including 1yr 24x7 Tech Support and Updates Single Svr License	BD775A
	HPE Integrated Lights-Out (iLO) Advanced for ProLiant	
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU NOTE: The Electronic software license is available in EMEA only.	E6U59ABE
	HP iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU	E6U64ABE
	NOTE: The Electronic software license is available in EMEA only.	
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License	512485-B21
	HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates	BD505A
	HP iLO Advanced Flexible Qty License with 3yr 24x7 Tech Support and Updates	BD506A

Additional Optio	ns	
	HP iLO Advanced Tracking License with 3yr 24x7 Tech Support and Updates	BD507A
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates Flexible Quantity License	512486-B21
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates Tracking License	512487-B21
	NOTE: For additional license kits, including electronic delivery options, please see the QuickSpecs at: <u>http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04154343</u> NOTE: For more information, visit: <u>http://www.hp.com/go/ilo</u> .	
High Performance	HPE Cluster Management Utility	
Clusters	HP Insight Cluster Management Utility Media	BD477A
	HP Insight Cluster Management Utility 3yr 24x7 Flexible License	BD476A
	HP Insight Cluster Management Utility 1yr 24x7 Flexible License	QL803B
	NOTE: For additional license kits please see the QuickSpecs at http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111735	
HPE Security	HP Trusted Platform Module Option	488069-B21
	 NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: http://www.hp.com/go/TPM. NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment. NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss. 	
HPE Storage Controll	ers SAS Controllers NOTE: Smart Array Storage controller can be added only in PCIe Slot 3, Slot 4 or both.	
	HPE Smart Array P222 Controller	
	HP Smart Array P222/512 FBWC 6Gb 1-port Int/1-port Ext SAS Controller	631667-B21
	HPE Smart Array P420 Controller	
	HP Smart Array P420/2GB FBWC 6Gb 2-ports Int SAS Controller	631671-B21
	HP Smart Array P420/1GB FBWC 6Gb 2-ports Int SAS Controller	631670-B21
	HPE Smart Array P421 Controller	
	HP Smart Array P421/2GB FBWC 6Gb 2-ports Ext SAS Controller	631674-B21
	HP Smart Array P421/1GB FBWC 6Gb 2-ports Ext SAS Controller	631673-B21
	Optional Upgrades	

HP 2GB P-series Smart Array Flash Backed Write Cache

631681-B21

HPE Disk Backup	NOTE: For the complete range of RDX drives and media see: <u>http://www.hp.com/go/rdx</u> . For hardware and software compatibility of HPE	
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111416	
Systems	HP StoreEver MSL6480 Scalable Base Module	QU625A
HPE Tape Storage	HPE StoreEver MSL6480	
	HP StoreEver LTO-5 Ultrium 3000 SAS Internal Tape Drive	EH957B
	HP StoreEver 1/8 G2 LTO-6 Ultrium 6250 FC Tape Autoloader	COH19A
	HP StoreEver LTO-6 Ultrium 6250 External Tape Drive	EH970A
	HP StoreEver LTO-6 Ultrium 6250 Internal Tape Drive	EH969A
	HP StoreEver LTO-6 Ultrium 6650 SAS External Tape Drive	EH964A
	HP StoreEver LTO-6 Ultrium 6650 SAS Internal Tape Drive	EH963A
	HP StoreEver LTO-6 Ultrium 6250 Tape Drive in 1U Rack-mount Kit	COL99A
	HPE StoreEver LTO-7 Ultrium 15000 External Tape Drive	BB874A
HPE Tape Backup	NOTE: For the complete range of tape drives, autoloaders, libraries and media see: <u>http://www.hp.com/go/tape</u> . For hardware and software compatibility of HPE tape backup products see: <u>http://www.hp.com/storage/SPOCK</u> and <u>http://www.hp.com/go/ebs</u> .	
	http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111455 (HBA H220) http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111475 (HBA 221) http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111514 (HBA 222)	
	information: http://www.8.hp.com/b20195/y2/GetHTML.aspy2docpame=c0//111/55	
	NOTE: Please see the QuickSpecs for Technical Specifications and additional	
	HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter	412911-B21
	HP H222 Host Bus Adapter	650926-B21
	HP H221 PCIe 3.0 SAS Host Bus Adapter	729552-B21
	HP H220 Host Bus Adapter	650933-B21
	(Smart Array P431 Controller) HPE Host Bus Adapters	
	http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111365	
	http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111533 (Smart Array P421 Controller)	
	<u>http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111474</u> (Smart Array P222 Controller)	
	information:	
	NOTE: Please see the QuickSpecs for Technical Specifications and additional	
	HP SmartCache No Media 24x7 Technical Support Electronic License	D7S27AAE
	HP SmartCache No Media 24x7 Technical Support Flexible License	D7S27A
	HP SmartCache No Media 24x7 Technical Support 1 Svr License	D7S26A

Additional Optior	ns	
	disk backup products see: http://www.hp.com/storage/SPOCK.	
	HPE RDX Removable Disk Backup System	
	HP RDX 2TB USB3.0 External Disk Backup System	E7X53B
	HP RDX 2TB USB3.0 Internal Disk Backup System	E7X52A
	HP RDX+ 1TB External Backup System	B7B69B
	HP RDX+ 500GB External Backup System	B7B66B
	HP RDX500 USB3.0 Internal Disk Backup System	B7B64A
	HP RDX1000 USB3.0 Internal Disk Backup System	B7B67A
	HP RDX+ External Docking System	C8S07B
	NOTE: Please see the QuickSpecs for additional part numbers, Technical Specifications, and additional information: http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111633	
HPE Disk Storage	Disk Enclosures	
Systems	HP D2600 w/12 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 48TB Bundle	E7W32A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111697	
HPE Uninterruptible	HPE DirectFlow Three Phase UPS	
Power Systems	Power Unit (1U UPS)	
	NOTE: #0D1 will appear after the part number on the sales order if HPE factory integration is indicated.	
	HP R12000 DirectFlow - 1U Rackmount Uninterruptible Power System	G9Y75A
	HP R12000 DirectFlow - POD 1U Rackmount Uninterruptible Power System	AF478A
	Input/Output Module Options for 1U UPS	
	NOTE: Choose one I/O Module per UPS. NOTE: #0D1 will appear after the part number on the sales order if HPE factory integration is indicated.	
	HP 32A 400-415 Volt Three Phase INTL R12000 DirectFlow UPS IEC309 Input/Output Module	AF488A
	HP 30A 400-415 Volt Three Phase NA R10000 DirectFlow UPS IEC309 Input/Output Module	AF489A
	HP 32A 380 Volt Three Phase China R12000 DirectFlow UPS Unterminated Input/Output Module	AF490A
	HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS L22-30 Input/Output Module	AF491A
	HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	AF492A
	HP 30A 400-415 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	G9Y76A
	NOTE: All Input/Output Modules support dual output outlets except the AF484A.	
	HPE Tower UPS	

HPE T750 G4 UPS Models	
HP T750 G4 NA/JP Uninterruptible Power System	J2P85A
HP T750 G4 INTL Uninterruptible Power System	J2P88A
HPE T1000 G4 UPS Models	
HP T1000 G4 NA/JP Uninterruptible Power System	J2P86A
HP T1000 G4 INTL Uninterruptible Power System	J2P89A
HPE T1500 G4 UPS Models	
HP T1500 G4 NA/JP Uninterruptible Power System	J2P87A
HP T1500 G4 INTL Uninterruptible Power System	J2P90A
HPE Rack/Tower UPS	
HPE R/T2200 G4 UPS Models	
HP R/T2200 G4 NA/JP Uninterruptible Power System	J2R00A
HPE R/T3000 G4 UPS Models	
HP R/T3000 G4 Low Voltage NA/JP Uninterruptible Power System	J2R01A
HP R/T3000 G4 High Voltage NA/JP Uninterruptible Power System	J2R02A
HP R/T3000 G4 High Voltage INTL Uninterruptible Power System	J2R04A
HPE Rack-mountable UPS	
HPE R1500 G4 Uninterruptible Power Supply (UPS)	
HP R1500 G4 NA Uninterruptible Power System	J2Q99A
HP R1500 G4 INTL Uninterruptible Power System	J2R03A
HP R1500 G4 JP/TWN Uninterruptible Power System	J2R05A
NOTE: Please see the QuickSpecs for additional information:	
http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04154342	
R5000 Uninterruptible Power System (UPS)	
HP R5000 3U IEC309-32A High Voltage INTL Uninterruptible Power System	AF461A
HP R5000 3U L630 High Voltage NA/JP Uninterruptible Power System	AF460A
NOTE: Please see the QuickSpecs for additional information:	
http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04154372	
R7000 Uninterruptible Power System (UPS)	
HP R7000 4U 50A High Voltage NA/JP Uninterruptible Power System	AF462A
HP R7000 4U IEC-32A High Voltage INTL Uninterruptible Power System	AF463A
NOTE: Please see the QuickSpecs for additional information:	
http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04154371	
NOTE: For additional information on sizing your server, please reference:	
http://www.upssizer.com.	
NOTE: Please see the UPS and PDU cable matrix's on the HPE Power Protection and Management page. Under Power Cords, click on the "HPE Power Cord	
Matrix" link. That link will list cable descriptions, requirements, and specifications	
for UPS and PDU units. Please see the following link:	
http://www.hp.com/products/powercords.	
NOTE: For additional information on HPE Uninterruptible Power Systems please	
go to: http://www.hp.com/servers/rackups.	

 HPE Basic Power Distribution Unit: Half Height Version HP 2.8kVA 120 Volt L5-30 Input (18xNEMA 5-20R) NA/JP Basic PDU HP 3.6kVA 200-240 Volt Detachable C20 Input (18xC13) WW Basic PDU HP 4.9kVA 208 Volt L6-30 Input (20xC13) NA/JP Basic PDU HP 7.3kVA 230 Volt IEC309 32A Input (20xC13) INTL Basic PDU HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13) NA/JP Basic PDU HPE Basic Power Distribution Unit: Mid Height Version HP 4.9kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PDU HP 7.3kVA 230 Volt IEC309 32A Input (24xC13/6xC19) INTL Basic PDU HP 7.3kVA 208 Volt L6-30 Input (24xC13/6xC19) INTL Basic PDU HP 7.3kVA 208 Volt 1EC309 32A Input (24xC13/6xC19) INTL Basic PDU HP 8.3kVA 208 Volt CS8265C Input (30xC13/6xC19) INTL Basic PDU HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) INTL Basic PDU HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU 	H5M54A H5M55A H5M55A H5M58A H5M68A H5M61A H5M59A H5M70A H5M60A H5M71A
 HP 3.8kVA 200-240 Voli Defactable C20 input (12xC13) WW Basic PD0 HPE Basic Power Distribution Unit: Half Height Version HP 2.8kVA 120 Volt L5-30 Input (18xNEMA 5-20R) NA/JP Basic PD0 HP 3.6kVA 200-240 Volt Detachable C20 Input (18xC13) WW Basic PD0 HP 4.9kVA 208 Volt L6-30 Input (20xC13) NA/JP Basic PD0 HP 7.3kVA 230 Volt IEC309 32A Input (20xC13) INTL Basic PD0 HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13) NA/JP Basic PD0 HP 4.9kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PD0 HP 4.9kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PD0 HP 7.3kVA 230 Volt IEC309 32A Input (24xC13/6xC19) INTL Basic PD0 HP 7.3kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PD0 HP 8.3kVA 208 Volt CS8265C Input (30xC13/6xC19) NA/JP Basic PD0 HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) INTL Basic PD0 HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PD0 HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PD0 HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP 	H5M55A H5M57A H5M58A H5M68A H5M61A H5M59A H5M70A H5M60A
HP 2.8kVA 120 Volt L5-30 Input (18xNEMA 5-20R) NA/JP Basic PDU HP 3.6kVA 200-240 Volt Detachable C20 Input (18xC13) WW Basic PDU HP 4.9kVA 208 Volt L6-30 Input (20xC13) NA/JP Basic PDU HP 7.3kVA 230 Volt IEC309 32A Input (20xC13) INTL Basic PDU HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13) NA/JP Basic PDU HPE Basic Power Distribution Unit: Mid Height Version HP 4.9kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PDU HP 7.3kVA 230 Volt IEC309 32A Input (24xC13/6xC19) INTL Basic PDU HP 7.3kVA 230 Volt IEC309 32A Input (24xC13/6xC19) INTL Basic PDU HP 8.3kVA 208 Volt CS8265C Input (30xC13/6xC19) INTL Basic PDU HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) INTL Basic PDU HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU	H5M57A H5M58A H5M68A H5M61A H5M59A H5M50A H5M60A
HP 3.6kVA 200-240 Volt Detachable C20 Input (18xC13) WW Basic PDU HP 4.9kVA 208 Volt L6-30 Input (20xC13) NA/JP Basic PDU HP 7.3kVA 230 Volt IEC309 32A Input (20xC13) INTL Basic PDU HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13) NA/JP Basic PDU HPE Basic Power Distribution Unit: Mid Height Version HP 4.9kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PDU HP 7.3kVA 230 Volt IEC309 32A Input (24xC13/6xC19) INTL Basic PDU HP 7.3kVA 208 Volt CS8265C Input (30xC13/6xC19) NA/JP Basic PDU HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) INTL Basic PDU HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) INTL Basic PDU HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU	H5M57A H5M58A H5M68A H5M61A H5M59A H5M50A H5M60A
HP 4.9kVA 208 Volt L6-30 Input (20xC13) NA/JP Basic PDU HP 7.3kVA 230 Volt IEC309 32A Input (20xC13) INTL Basic PDU HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13) NA/JP Basic PDU HPE Basic Power Distribution Unit: Mid Height Version HP 4.9kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PDU HP 7.3kVA 230 Volt IEC309 32A Input (24xC13/6xC19) INTL Basic PDU HP 8.3kVA 208 Volt CS8265C Input (30xC13/6xC19) NA/JP Basic PDU HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) INTL Basic PDU HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) WW Basic PDU HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU	H5M58A H5M68A H5M61A H5M59A H5M70A H5M60A
 HP 7.3kVA 230 Volt IEC309 32A Input (20xC13) INTL Basic PDU HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13) NA/JP Basic PDU HPE Basic Power Distribution Unit: Mid Height Version HP 4.9kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PDU HP 7.3kVA 230 Volt IEC309 32A Input (24xC13/6xC19) INTL Basic PDU HP 8.3kVA 208 Volt CS8265C Input (30xC13/6xC19) NA/JP Basic PDU HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) INTL Basic PDU HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP 	H5M68A H5M61A H5M59A H5M70A H5M60A
HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13) NA/JP Basic PDU HPE Basic Power Distribution Unit: Mid Height Version HP 4.9kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PDU HP 7.3kVA 230 Volt IEC309 32A Input (24xC13/6xC19) INTL Basic PDU HP 8.3kVA 208 Volt CS8265C Input (30xC13/6xC19) NA/JP Basic PDU HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) INTL Basic PDU HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP	H5M61A H5M59A H5M70A H5M60A
HPE Basic Power Distribution Unit: Mid Height Version HP 4.9kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PDU HP 7.3kVA 230 Volt IEC309 32A Input (24xC13/6xC19) INTL Basic PDU HP 8.3kVA 208 Volt CS8265C Input (30xC13/6xC19) NA/JP Basic PDU HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) INTL Basic PDU HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP	H5M59A H5M70A H5M60A
HP 4.9kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PDU HP 7.3kVA 230 Volt IEC309 32A Input (24xC13/6xC19) INTL Basic PDU HP 8.3kVA 208 Volt CS8265C Input (30xC13/6xC19) NA/JP Basic PDU HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) INTL Basic PDU HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP	H5M70A H5M60A
HP 7.3kVA 230 Volt IEC309 32A Input (24xC13/6xC19) INTL Basic PDU HP 8.3kVA 208 Volt CS8265C Input (30xC13/6xC19) NA/JP Basic PDU HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) INTL Basic PDU HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP	H5M70A H5M60A
HP 8.3kVA 208 Volt CS8265C Input (30xC13/6xC19) NA/JP Basic PDU HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) INTL Basic PDU HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP	H5M60A
HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) INTL Basic PDU HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP	
HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP	Н5М714
HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP	
PDU HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP	H5M75A
	H5M63A
	H5M64A
HP 8.6kVA 208 Volt L15-30 3-Phase Input (24xC13/6xC19) NA/JP Basic PDU	H5M62A
HP 11kVA 400 Volt IEC309 16A 3-Phase Input (30xC13/6xC19) INTL Basic PDU	H5M72A
HPE Basic Power Distribution Unit: Full Height Version	
HP 11kVA 400 Volt IEC309 16A 3-Phase Input (36xC13/6xC19) INTL Basic PDU	H5M73A
HP 11kVA 400 Volt IEC309 30A 3-Phase Input (36xC13/6xC19) NA Basic PDU	H5M67A
HPE Basic Power Distribution Unit: 480/277 Volt Version	
HP 800VA - 277V Input / 230V Output NA Rack Mount Transformer	H3X09A
NOTE: Please see the QuickSpecs for additional information: <u>http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111392</u> NOTE: Additional HPE Power Distribution Units are available. For a complete list of all HPE PDUs and additional information please visit <u>http://www.hp.com/go/rackandpower</u> .	
HPE Metered Power HPE Remote Monitored Power Distribution Unit: 1U Version	
Distribution Units HP 2.8kVA 120 Volt L5-30 Input (12xNEMA 5-20R)NA/JP Monitored PDU	D9N43A
(PDU) HP 3.6kVA 200-240 Volt Detachable C20 Input (12xC13) WW Monitored PDU	D9N46A
HP 4.9kVA 208 Volt L6-30 Input (12xC13) NA/JP Monitored PDU	D9N44A
HPE Remote Monitored Power Distribution Unit: Half Height Version	2 / 1 / 1 / 1
HP 3.6kVA 200-240 Volt Detachable C20 Input (16xC13) WW Monitored PDU	D9N45A
HP 4.9kVA 208 Volt L6-30 Input (12xC13) NA/JP Monitored PDU	G9Z05A
HP 7.3kVA 230 Volt IEC309 32A Input (12xC13) INTL Monitored PDU	G9Z06A
HPE Remote Monitored Power Distribution Unit: Mid Height Version	JILUUA
HP 4.9kVA 208 Volt L6-30 Input (20xC13/4xC19) NA/JP Monitored PDU	

HP 7.3kVA 230 Volt IEC309 32A Input (20xC13/4xC19) INTL Monitored PDU	D9N48A
HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13/3xC19) NA/JP Monitored PDU	D9N51A
HP 5.7kVA 208 Volt L21-20 3-Phase Input (18xC13/3xNEMA 5-20R) NA/JP Monitored PDU	D9N52A
HP 8.6kVA 208 Volt L21-30 3-Phase Input (20xC13/3xC19/3xNEMA 5-20R) NA/JP Monitored PDU	D9N53A
HP 11kVA 400 Volt IEC309 16A 3-Phase Input (18xC13/3xC19) INTL Monitored PDU	D9N55A
HPE Remote Monitored Power Distribution Unit: Full Height Version	
HP 8.3kVA 208 Volt CS8265C Input (30xC13/3xC19) NA Monitored PDU	D9N49A
HP 7.3kVA 230 Volt IEC309 32A Input (32xC13/4xC19) INTL Monitored PDU	D9N50A
HP 11kVA 400 Volt IEC309 16A 3-Phase Input (30xC13/3xC19) INTL Monitored PDU	D9N57A
HP 14.4kVA 208 Volt CS8365C 3-Phase Input (12xC13/12xC19)NA Monitored PDU	D9N58A
HP 16.6kVA 400 Volt IEC309 30A 3-Phase Input (30xC13/3xC19) NA Monitored PDU	D9N61A
HP 17.3kVA 208 Volt IEC309 60A 3-Phase Input (24xC13/3xC19) NA/JP Monitored PDU	D9N54A
HP 17.3kVA 208 Volt IEC309 60A 3-Phase Input (12xC13/12xC19) NA/JP Monitored PDU	D9N59A
HP 22kVA 400 Volt IEC309 32A 3-Phase Input (12xC13/12xC19) INTL Monitored PDU	D9N60A
HP 22kVA 400 Volt IEC309 32A 3-Phase Input (30xC13/3xC19) INTL Monitored PDU	D9N56A
HP 16.6kVA 400 Volt IEC309 30A 3-Phase Input (12xC13/12xC19) NA Monitored PDU	D9N62A
HP 19.9kVA 480 Volt 3-Phase (30 Outlet) NA Monitored PDU	D9N63A
HPE Environmental Sensor for Remote Monitored PDUs	
HP Environmental Sensor for Remote Monitored and Managed PDUs	E2D53A
NOTE: Please see the QuickSpecs for additional information:	
http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04229509	

HPE Intelligent Power iPDU Core Units Distribution Unit (PDU)

HP 4.9kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF520A
HP 8.3kVA 40A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF521A
HP 8.6kVA 24A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF522A
HP 14.4kVA 40A Three Phase NA/JP Intelligent Modular Power Distribution Unit	AF533A
HP 17.3kVA 48A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF523A
HP 7.3kVA 32A Single Phase INTL Core Intelligent Modular Power Distribution Unit	AF525A
HP 11kVA 16A Three Phase INTL Core Intelligent Modular Power Distribution Unit	AF526A
HP 22kVA 32A Three Phase INTL Core Intelligent Modular Power Distribution Unit	AF527A
HP 17.3kVA 48A 208V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit	AF535A
HP 17.3kVA 24A 415V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit	AF537A
HP 22kVA 32A 400V Three Phase 12 Outlet Core INTL Intelligent Power Distribution Unit	AF538A
iPDU Kits with Standard Extension Bars	
	HP 8.3kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit HP 8.3kVA 40A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit HP 14.4kVA 40A Three Phase NA/JP Intelligent Modular Power Distribution Unit HP 17.3kVA 48A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit HP 17.3kVA 48A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit HP 7.3kVA 32A Single Phase INTL Core Intelligent Modular Power Distribution Unit HP 11kVA 16A Three Phase INTL Core Intelligent Modular Power Distribution Unit HP 22kVA 32A Three Phase INTL Core Intelligent Modular Power Distribution Unit HP 17.3kVA 48A 208V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit HP 17.3kVA 24A 415V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit HP 22kVA 32A 400V Three Phase 12 Outlet Core INTL Intelligent Power Distribution Unit

Additional Optio	ns	
	HP 4.9kVA 24A Single Phase NA/JP Intelligent Modular Power Distribution Kit	AF531A
	HP 8.6kVA 24A Three Phase NA/JP Intelligent Modular Power Distribution Kit	AF532A
	HP 7.3kVA 32A Single Phase INTL Intelligent Modular Power Distribution Kit	AF534A
	iPDU Extension Bars	
	HP 5xC13 Intelligent PDU Extension Bar G2 Kit	AF547A
	HP 5xC13 Outlets Power and UID LEDs Pair Standard Extension Bar	AF528A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional	
	information: <u>http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04123329</u>	
	<u> </u>	
HPE Metered and Switched Power	Half Height Models	
Switched Power Distribution Units	HP 3.6kVA 200-240 Volt Detachable C20 Input (7xC13/1xC19) WW Managed PDU	H8B49A
(PDU)	Full Height Models	
	HP 2.8kVA 120 Volt L5-30 Input (24x NEMA 5-20) NA/JP Managed PDU	H8B48A
	HP 4.9kVA 208 Volt L6-30 Input (20xC13/4xC19) NA/JP Managed PDU	H8B50A
	HP 7.3kVA 200-240 Volt IEC309 32A Input (20xC13/4xC19) INTL Managed PDU	H8B51A
	HP 8.6kVA 208 Volt L15-30 3 Phase Input (18xC13/6xC19) NA/JP Managed PDU	H8B52A
	HP 8.6kVA 208 Volt L21-30 3 Phase Input (20xC13/3xC19/1x NEMA 5-20) NA/JP Managed PDU	H8B53A
	HP 11kVA 400 Volt IEC309 16A 3 Phase Input (21xC13/3xC19) INTL Managed PDU	H8B54A
	HP 14.4kVA 208V CS8365C 3 Phase Input (12xC13/12xC19) NA/JP Managed PDU	H8B55A
	HP 17.3kVA 208V IEC309 60A 3 Phase Input (12xC13/12xC19) NA/JP Managed PDU	H8B56A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	http://www8.hp.com/h20195/v2/GetHtml.aspx?docname=c04376673	
HPE Rack Series	HPE Intelligent Series Rack	
	HP 42U 600mm x 1075mm Enterprise Pallet Rack	BW903A
	HP 42U 600mm x 1075mm Enterprise Shock Rack	BW904A
	NOTE: Please see the QuickSpecs for Technical Specifications such as height,	
	width, depth, weight, and color:	
	http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04123237	
	NOTE: For additional information regarding Rack Cabinets, please see the	
	following URL: http://www.hp.com/go/rackandpower.	;
HPE Rack Options	HPE LCD8500 1U Rackmount Console Kit Models	
	HP LCD8500 1U US Rackmount Console Kit	AF630A
	HP LCD8500 1U UK Rackmount Console Kit	AF631A
	HP LCD8500 1U DE Rackmount Console Kit	AF632A
	HP LCD8500 1U FR Rackmount Console Kit	AF633A
	HP LCD8500 1U JP Rackmount Console Kit	AF642A
	HP LCD8500 1U RU Rackmount Console Kit	AF643A
	HP LCD8500 1U INTL Rackmount Console Kit	AF644A
	HP LCD8500 1U US TAA Rackmount Console Kit	AF645A
		Page 3

HP Kit LCD 1.83m Latch Display Port Cable	G7T29
HP Location Discovery Services LCD8500 Kit	TL05
HP Rack LED Light Kit	BW93
NOTE: Please see the QuickSpecs for Technical Specifications and additional	
information:	
http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04154398	
HPE USB Keyboard and Mouse	
HP USB BFR with PVC Free US Keyboard/Mouse Kit	631341-E
HP USB BFR with PVC Free UK Keyboard/Mouse Kit	631344-E
HP USB BFR with PVC Free FR Keyboard/Mouse Kit	631346-E
HP USB BFR with PVC Free ES Keyboard/Mouse Kit	631348-E
HP USB BFR with PVC Free DE Keyboard/Mouse Kit	631358-E
HP USB BFR with PVC Free JP Keyboard/Mouse Kit	631360-E
HP USB BFR with PVC Free IT Keyboard/Mouse Kit	631362-E
HP USB BFR with PVC Free CN Keyboard/Mouse Kit	631364-E
HP USB BFR with PVC Free AE Keyboard/Mouse Kit	638212-8
HP USB BFR with PVC Free RU Keyboard/Mouse Kit	638214-6
HP USB BFR with PVC Free IN Keyboard/Mouse Kit	672097-D
HP USB BFR with PVC Free AP-Intl Keyboard/Mouse Kit	672097-3
HP USB BFR with PVC Free Intl Keyboard/Mouse Kit	672097-E
HP USB BFR with PVC Free PT Keyboard/Mouse Kit	672097-
HP USB BFR with PVC Free TR Keyboard/Mouse Kit	672097-1
HP USB BFR with PVC Free CZ Keyboard/Mouse Kit	672097-2
HP USB BFR with PVC Free FI Keyboard/Mouse Kit	672097-3
HP USB BFR with PVC Free SE Keyboard/Mouse Kit	672097-1
HP USB BFR with PVC Free CH Keyboard/Mouse Kit	672097-
HP USB BFR with PVC Free KR Keyboard/Mouse Kit	672097-K
NOTE: Please see the QuickSpecs for Technical Specifications and additional	
information:	
http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04168349	
HPE Server Console Switches	
HP 0x1x8 G3 KVM Console Switch	AF65
HP 0x2x16 G3 KVM Console Switch	AF65
HP TAA 0x2x16 G3 KVM Console Switch	AF65
HP USB Remote Access Key for G3 KVM Console Switches	AF65
NOTE: Please see the QuickSpecs for Technical Specifications and additional	
information:	
http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04123433	
HPE Server Console Switch G2 with Virtual Media & CAC	
HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software	AF61
HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software	AF61

	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04168373	
	HPE IP Console Switch G2 with Virtual Media & CAC	
	HP 1x4 USB/PS2 KVM Console Switch	AF611A
	HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software	AF620A
	HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software	AF621A
	HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software	AF622A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional	
	information:	
	http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04168374	
HPE USB and SD	HPE Flash Media Kits for USB Drives	
Options	NOTE: Hewlett Packard Enterprise qualified blank USB key for use with HPE ProLiant servers that support the VMware virtualization environment and other Hewlett Packard Enterprise value-add software. Hewlett Packard Enterprise recommends this industry standard USB flash device for use with VMware ESXi. USB device must be installed in the internal slot of the ProLiant server for use with VMware ESXi. Refer to HPE VMware Getting Started Guide for installation instructions.	
	HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit	737953-B2 [°]
	HPE Enterprise Mainstream Flash Media Kits for Memory Cards	
	HP 8GB microSD Enterprise Mainstream Flash Media Kit	726116-B2 [°]
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04123175	
HPE Care Pack Services	Proactive Care NOTE: Collaborative Support plus Proactive services delivered by the onshore, local language Advanced Solution Center (ASC), end-to-end case ownership from a Technical Solution Specialists and Technical Account Manager who remotely delivers firmware/software revision management, proactive scans and incident trend reports. Recommended for customers running a virtualized infrastructure and/or customers who desire an enhanced call support	
	experience. HPE 3 year Proactive Care 24x7 ProLiant ML310e Service	U6F73E
	experience. HPE 3 year Proactive Care 24x7 ProLiant ML310e Service	U6F73E U6F74E
	experience. HPE 3 year Proactive Care 24x7 ProLiant ML310e Service HPE 3 year Proactive Care 24x7 with DMR ProLiant ML310e Service	U6F74E
	experience. HPE 3 year Proactive Care 24x7 ProLiant ML310e Service	
	experience. HPE 3 year Proactive Care 24x7 ProLiant ML310e Service HPE 3 year Proactive Care 24x7 with DMR ProLiant ML310e Service HPE 3 year Proactive Care 24x7 with CDMR ML310e Service Foundation Care	U6F74E U9E08E
	experience. HPE 3 year Proactive Care 24x7 ProLiant ML310e Service HPE 3 year Proactive Care 24x7 with DMR ProLiant ML310e Service HPE 3 year Proactive Care 24x7 with CDMR ML310e Service Foundation Care HPE 3 year Foundation Care 24x7 ML310e Service	U6F74E U9E08E U2FR3E
	experience. HPE 3 year Proactive Care 24x7 ProLiant ML310e Service HPE 3 year Proactive Care 24x7 with DMR ProLiant ML310e Service HPE 3 year Proactive Care 24x7 with CDMR ML310e Service Foundation Care HPE 3 year Foundation Care 24x7 ML310e Service HPE 3 year Foundation Care 24x7 wCDMR ML310e Service	U6F74E
	experience.HPE 3 year Proactive Care 24x7 ProLiant ML310e ServiceHPE 3 year Proactive Care 24x7 with DMR ProLiant ML310e ServiceHPE 3 year Proactive Care 24x7 with CDMR ML310e ServiceFoundation CareHPE 3 year Foundation Care 24x7 ML310e ServiceHPE 3 year Foundation Care 24x7 wCDMR ML310e ServiceHPE 3 year Foundation Care 24x7 wDMR ML310e ServiceHPE 3 year Foundation Care 24x7 wDMR ML310e Service	U6F74f U9E08f U2FR3f U2FR5f U2FR4f
	experience. HPE 3 year Proactive Care 24x7 ProLiant ML310e Service HPE 3 year Proactive Care 24x7 with DMR ProLiant ML310e Service HPE 3 year Proactive Care 24x7 with CDMR ML310e Service Foundation Care HPE 3 year Foundation Care 24x7 ML310e Service HPE 3 year Foundation Care 24x7 wCDMR ML310e Service	U6F74E U9E08E U2FR3E U2FR5E

Installation Services	
NOTE: Reduce the time required to get your system up and running and help minimize disruptions to your business.	
HPE Installation ML310e/ML110 Service	U6G21E
HPE Installation and Startup ML310e Service	U6G23E
NOTE: For more information, customer/resellers can contact:	
http://www.hp.com/services/carepack	

Memory

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

HPE SmartMemory

New HPE SmartMemory now provides additional protection for your servers. With Hewlett Packard Enterprise Authentication it can verify that you have true Hewlett Packard Enterprise Qualified Memory in your HPE ProLiant Gen8 server. With HPE SmartMemory your new HPE ProLiant server can take advantage of additional Gen8 enhancements in performance, durability and future manageability support through HPE Active Health System

DDR3 memory population guidelines

For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: <u>http://www.hp.com/go/ddr3memory-configurator</u>

General Guidelines:

- The HPE ProLiant ML310e Gen8 v2 Server has four memory slots
- There are two channels per server with two DIMM slots per channel
- Memory channel 1 consists of the two (2) DIMMs that are closest to the processor
- Memory channel 2 consists of the two (2) DIMMs that are furthest from the processor
- Different types of processors have different types of memory support.
- Support for single/dual-rank 1333/1600 MT/s ECC UDIMM (unbuffered DIMMS)
- The server supports up to 32 GB (4 x 8-GB) for Unbuffered DIMMs
- No support for LRDIMMs; RDIMMs; Non-ECC UDIMMs
- Do not install DIMMs if the processor is not installed
- Populate DIMMs from heaviest load (double-rank) to lightest load (single-rank)
- Non-ECC DIMMs are not supported
- Always use Hewlett Packard Enterprise qualified DIMMs

ML310e Gen8 v2 Supported Memory Bandwidth and Capacity

DIMM Type			U	nbuffered v	vith ECC DIN	1Ms (UDIMM	ls)		
DIMM Rank	Si	ngle Rank (1	IR)			D)ual Rank (2	R)	
DIMM Capacity	2GB	2GB	2GB	4GB	4GB	4GB	8GB	8GB	8GB
DIMM Native Speed (MT/s)	1333	1600	1600	1333	1600	1600	1333	1600	1600
Voltage	LV	Std	LV	LV	Std	LV	LV	Std	LV
SLOTS THAT C	AN BE POP	ULATED							
4 slot servers	4	4	4	4	4	4	4	4	4
ΜΑΧΙΜUΜ CAP	ACITY (GB))*							
	8	8	8	16	16	16	32	32	32
POPULATED D	IMM SPEED	(MT/s)					-	-	·
1 DIMM Per Channel	1333	1600	1600	1333	1600	1600	1333	1600	1600
2 DIMM Per Channel	1333**	1600	1600	1333**	1600	1600	1333**	1600	1600

NOTE: Memory speed is a function of the processor QPI bus speed. To realize the performance memory capabilities listed above HPE SmartMemory is required.

* Maximum capacity will vary based on individual server platform qualification schedule

Memory

** For HPE SmartMemory, UDIMM is supported at 2DPC@1333 at 1.35V. Third party memory may only support up to 2DPC@1066 at 1.5V.


Mem	ory		S	lot	
		DIMM1C	DIMM2A	DIMM3D	DIMM4B
Standard	8 GB	Empty	8 GB	Empty	Empty
(Performance Model)					
Maximum	32 GB	8 GB	8 GB	8 GB	8 GB

Memory Speed by Processor Model	
Processor Models	Supported Memory Speeds
E3-1220v3, E3-1230v3, E3-1240v4, E3-1270v3	1600/1333

NOTE: Capacity references are rounded to the common Gigabyte values.

- 2GB = 2048MB
- 4GB = 4096MB
- 8GB = 8192MB

HPE Memory

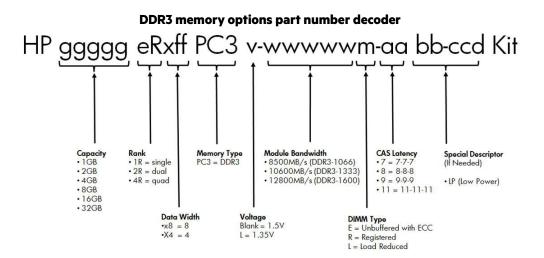

Following are memory options available from Hewlett Packard Enterprise:

Unbuffered with ECC DIMMs (UDIMMs)

HP 2GB (1x2GB) Single Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669320-B21
HP 2GB (1x2GB) Single Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647905-B21
HP 2GB (1x2GB) Single Rank x8 PC3L-12800E (DDR3-1600) Unbuffered CAS-11 Low Voltage Memory Kit	713975-B21
HP 4GB (1x4GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669322-B21
HP 4GB (1x4GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low	647907-B21


Memory

NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed	
Memory Kit	
HP 4GB (1x4GB) Single Rank x4 PC3-12800E (DDR3-1600) Unbuffered CAS-11	820077-B21
HP 8GB (1x8GB) Dual Rank x8 PC3L-12800E (DDR3-1600) Unbuffered CAS-11 Low Voltage Memory Kit	713979-B21
HP 8GB (1x8GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647909-B21
HP 8GB (1x8GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669324-B21
HP 4GB (1x4GB) Dual Rank x8 PC3L-12800E (DDR3-1600) Unbuffered CAS-11 Low Voltage Memory Kit	713977-B21
Voltage Memory Kit	

memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: <u>http://www.hp.com/go/ddr3memory-configurator</u>.

Storage

<u>}</u>	<u> </u>	<u> </u>	<u> </u>	•T
				-
				11
- · · · · · · · · · · · · · · · · · · ·		4	_	14
	079373275	REPORT	าวระกาด	eq.
TT (88)	883883	R 338	63693	- 1
E w			RER	
م م اہ		1 11	D D	
ണ്	-	No.	X X.	Чdı
"LEO	• D []	O FR D	00	101
ALTERNO	21.8.1	1 3	л. л.,	
			bitt	Ľ١
0 mar	م مر مسر م	<u>م م</u>	- 7 - 1 5	- 0
	88.	1.1.	88	11/1
Ini Ta	34	56	78	۹I.I
I CHARACT	where where a		110	JU
: fofc	NOYO	I OIC	NOIC	119
				5 P.I
P. L.L.				19
· 33333	20000000		323333	: UI
· · · ·				
D	dB	0.0.0	A.G.G.	êo -
29	- 21	REE	6224	88
0000	_Q2	388		8
		388	8383	19
B	- 23	888	2010	K(II)
U	日日の	Contraction of the local distribution of the	18	Kol"
	- 87		3 C	88
1219		~ 404	040404	₩0 e



1-8	8 x 2.5" (SFF) SAS/SATA hard drive bays
А	Removable Optical Drive

- B Removable Optical Drive
 - **NOTE:** Once Redundant Power Supply is installed, Bay A will be the only media bay available for use.

- 1 4 4 x 3.5" (LFF) SAS/SATA hard drive bays
- A Removable Optical Drive
- B Removable Optical Drive **NOTE:** Once Redundant Power Supply is installed, Bay A will be the only media bay available for use.

Technical Specifications

Tower Weight (approximate)Maximum (all hard drives, power supples, and processors installed)418 lb (18.96 kg)(approximate)(all hard drives, power supply, and processor installed)52.97 lb (11.47 kg)Input Requirements (per power supply), and processor installed)700 to 24.0 VAC to 24.0 VACInput Requirements (per power supply)Rated Input Current Rated Input Prequency Ated Input Prequency 44.00 wt 100 V AC input 44.00 wt 100 V AC inputBTU RatingMaximum Maximum260V-T775 BTU / hr (at 120 VAC), 1715 (at 250 V (at 100 VAC) 350 W (at 100 VAC) 350 W (at 200 VAC)Power Supply Output (per power supply)Rated Steady-State Power Maximum Peak Power350 W (at 100 VAC) 350 W (at 200 VAC)System Inlet TemperatureOperating10° to 35°C (50° to 58°T) at sea level with an altitude derating of 10°C per every 304.8 m (18°T per every 1000 fb) above sea level to a maximum of 3048 m (100,000 fb), no direct sustained sunghth Maximum rate of change is 20°C/hr (38°T-hb).Relative Humidity (non-condensing)Operating-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (38°T-hb).Non-operatingNon-operating50 v9% relative humidity (Rb), 38°C (2017FE) maximum wet bub temperature, non- condensing).AttitudeOperating50 v9% relative humidity (Rb), 38°C (2017FE) maximum wet bub temperature, non- condensing).Non-operatingSo v9% relative humidity (Rb), 38°C (2017FE) maximum wet bub temperature, non- condensing).Non-operatingSo v9% relative humidity (Rb), 38°C (2017FE) maximum wet bub temperature, non- condensing).	System Unit	Tower Dimensions (H x W x D) (with feet/bezel)	14.5.x 6.89 x 18.71 in (36.82	x17.5 x 47.52 cm)
Cone hard drive, power supply, and processor installed)Cone hard drive, power supply, and processor installed)Input Requirements (per power supply)Rated Line Voltage100 to 240 VACRated Input Frequency 440W at 200V AC input 		Tower Weight	(all hard drives, power supplies, and processors	41.8 lb (18.96 kg)
(per power supply)Rated Input Current6 Amps Rated Input Frequency47 to 63 Hz Rated Input PowerBTU RatingMaximum440W at 100 V AC input 440W at 200 V AC input 440W at 200 V AC) 240 VAC)BTU RatingMaximum240 VAC)Power Supply Output (per power supply)Rated Steady-State Power 350 W (at 100 VAC), 350 W (at 200 VAC)System Inlet TemperatureOperating10° to 35°C (50° to 95°F) at sea level with an altitude derating of 10°C per ever 304.8 m (18°F per ever) 1000 ft) above sea level to a maximum of 3048 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/h). The upper limit may be limited by the type and number of options installed. System performance may be reduced if coperating with a fan fault or above 30°C (86°F).Relative Humidity (non-condensing)Operating30° to 60°C (-22° to 140°F). Maximum rate of change is 30° to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non- condensing.AltitudeOperating51 to 93° relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.AltitudeOperating30% 8 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum wet bulb temperature, non- condensing.			(one hard drive, power supply, and processor	25.29 lb (11.47 kg)
Rated Input Frequency47 to 63 HzRated Input Power440W at 100 V AC input 440W at 200 V AC input 440W at 200 V AC input 460W -173 BTU / hr (at 120 VAC), 1715 (at 240 VAC)BTU RatingMaximum460W -173 BTU / hr (at 120 VAC), 1715 (at 240 VAC)Power Supply Output (per power supply)Rated Steady-State Power 350 W (at 100 VAC), 350 W (at 200 VAC)System Inlet TemperatureOperating10° to 35°C (50° to 95°F) at sea level with an altitude derating of 10°C per every 304.8 m (18°F per every 1000 ft) above sea level to a maximum of 3048 m (10000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (88°F). Non-operatingRelative Humidity (non-condensing)Operating-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (38°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (88°F). Non-operatingRelative Humidity (non-condensing)Operating10 to 90% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.AltitudeOperating50 operating50 operating 3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).		Input Requirements	Rated Line Voltage	100 to 240 VAC
Rated Input Power440W at 100 V AC input 440W at 200V AC inputBTU RatingMaximum460W - 1773 BTU / hr (at 120 VAC), 1715 (at 240 VAC)Power Supply Output (per power supply)Rated Steady-State Power350 W (at 100 VAC), 350 W (at 100 VAC), 350 W (at 200 VAC)System Inlet TemperatureOperating100 to 35°C (50° to 95°F) at sea level with an altitude derating of 10°C per every 304.8 m (18°F per every 1000 ft) above sea level to a maximum of 3048 m (10000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed.Relative Humidity (non-condensing)Operating-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).Non-operating-10 to 90% relative humidity (Rh), 38.7°C (1017°F) maximum wet bulb temperature, non- condensing.AttitudeOperating5 to 95% relative humidity (Rh), 38.7°C (1017°F) maximum wet bulb temperature, non- condensing.AttitudeOperating50.400 ft), This value may be limited by the type and number of options installed.Maximum AltitudeOperating50.400 ft). This value may be limited by the type and number of options installed.		(per power supply)	Rated Input Current	6 Amps
Rated Input Power440W at 100 V AC input 440W at 200V AC inputBTU RatingMaximum460W - 1773 BTU / hr (at 120 VAC), 1715 (at 240 VAC)Power Supply Output (per power supply)Rated Steady-State Power350 W (at 100 VAC), 350 W (at 200 VAC)System Inlet TemperatureOperating0 porating10' to 35°C (50' to 95°F) at sea level with an altitude derating of 1.0°C per every 30.48 m (18°F per every 1000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (88°F).Relative Humidity (non-condensing)Operating10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non- condensing.AttitudeOperating51 o 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.AttitudeOperating50 40% relative humidity (Rh), 38.7°C (101.7°F) maximum met bulb temperature, non- condensing.AttitudeOperating50 40% relative humidity (Rh), 38.7°C (101.7°F) maximum met bulb temperature, non- condensing.AttitudeOperating50 40% relative humidity (Rh), 38.7°C (101.7°F) maximum met bulb temperature, non- condensing.AttitudeOperating50 40% relative humidity (Rh), 38.7°C (101.7°F) maximum met bulb temperature, non- condensing.Bertor HumidityOperating50 40% relative humidity (Rh), 38.7°C (101.7°F) maximum met bulb temperature, non- condensing.CondensingSustem Step at thumidity (Rh), 38.7°C (101.7°F) maximum met			Rated Input Frequency	47 to 63 Hz
Power Supply Output (per power supply)Rated Steady-State Power 350 W (at 100 VAC), 350 W (at 200 VAC) 350 W (at 200 VAC)Maximum Peak Power350 W (at 100 VAC), 350 W (at 200 VAC)System Inlet TemperatureOperatingTemperature0° to 35°C (50° to 95°F) at sea level with an altitude derating of 10°C per every 304.8 m (18°F per every 1000 ft) above sea level to a maximum of 3048 m (10,000 ft), no tieret sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F).Non-operating-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).Relative Humidity (non-condensing)OperatingNon-operating5 to 95% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non- condensing.Non-operating5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.AltitudeOperating5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.AltitudeOperating5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.				•
(per power supply)350 W (at 200 VAC)Maximum Peak Power350 W (at 100 VAC), 350 W (at 200 VAC)System Inlet TemperatureOperating10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 304.8 m (1.8°F per every 1000 ft) above sea level to a maximum of 3048 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10° (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F).Non-operating-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).Relative Humidity (non-condensing)Operating10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non- condensing.Non-operating5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.AltitudeOperating5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.AltitudeOperating5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.AltitudeOperating5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.AltitudeOperating5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.AltitudeOperating5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.Non-operating5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.<		BTU Rating	Maximum	
System Inlet TemperatureOperating10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 304.8 m (1.8°F per every 1000 ft) above sea level to a maximum of 3048 m (10.000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F).Non-operating-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).Relative Humidity (non-condensing)Operating10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non- condensing.Non-operating5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.AltitudeOperating3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).			Rated Steady-State Power	
Temperaturealtitude derating of 1.0°C per every 304.8 m (1.8°F per every 1000 ft) above sea level to a maximum of 304.8 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F).Non-operating-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).Relative Humidity (non-condensing)Operating10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non- condensing.Non-operating5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.Sto 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.AltitudeOperating30.48 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).			Maximum Peak Power	
Relative Humidity (non-condensing)Operating10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non- condensing.Non-operating5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.AltitudeOperatingSolver and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).		-	Operating	altitude derating of 1.0°C per every 304.8 m (1.8°F per every 1000 ft) above sea level to a maximum of 3048 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if
(non-condensing)maximum wet bulb temperature, non-condensing.Non-operating5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.AltitudeOperating3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).			Non-operating	
AltitudeOperatingmaximum wet bulb temperature, non- condensing.AltitudeOperating3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).			Operating	maximum wet bulb temperature, non-
by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).			Non-operating	-
Non-operating 9144 m (30,000 ft). Maximum allowable altitude				
		Altitude	Operating	condensing. 3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457

Technical Specifications

	Acoustic Noise	change rate is 457 m/min (1500 ft/min). Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).			
		Idle			
		L WAd	4.0 B		
		L pAm	26dB-A		
		Operating			
		L WAd	4.0 B		
			26dB-A d levels apply to standard shipping nal options may result in increased sound levels.		
	Emissions Classification	FCC Rating	Class B		
	(EMC)	Normative Standards	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1		
		sample (type) testing, e	ance to cited product specifications is based on valuation, or assessment. This product or family bear the appropriate compliance logos and		
HPE Dynamic Smart	Dimensions	Embedded			
Array B120i Controller	Disk Drive and Enclosure Interface - Transfer rate	Up to 6Gb/s SATA (Seria	I ATA)		
	Connectors	6 internal SATA connecto	ors		
	Server Interface	x4 PCIe 2.0			
	SATA Speed	6Gb/s SATA links			
	Cache Memory	Zero Memory RAID has no cache memory			
	Logical Drives Supported	Up to 8 logical volumes (6 physical drives)			
	Host Memory Addressing	64-bit, supporting greater than 4GB server memory space			
	Hot Plug Support	Yes			
	RAID Support	RAID 0 (Striping), RAID 1 (Mirroring) RAID 1+0 (Striping & Mirroring)			
HPE Ethernet 1Gb 2-port	Network Interface	10Base-T/100Base-TX/10	DOOBase-TX		
772: Adapter		IEEE 802.3 10Base-T			
332i Adapter	Compatibility	IEEE 802.3 IOBase- I			
3321 Adapter	Compatibility	IEEE 802.3 IOBase- I IEEE 802.3ab 1000Base-	т		

Technical Specifications

		Energy Efficient Ethernet (EEE) compliant with IEEE Std 802.3az (default is disabled)		
	Data Transfer Method	PCI-e, two lanes (x2)		
	Controller	BCM5720		
	Network Transfer Rate	10Base-T (Half-Duplex)	10 Mb/s per port, 20 Mb/s Combined	
		10Base-T (Full-Duplex)	20 Mb/s per port, 40 Mb/s Combined	
		100Base-TX (Half-Duplex)) 100 Mb/s per port, 200 Mb/s Combined	
		100Base-TX (Full-Duplex)	200 Mb/s per port, 400 Mb/s Combined	
		1000Base-TX (Half- Duplex)	1000Mb/s per port, 2000 Mb/s Combined	
		1000 Base-TX (Full- Duplex)	2000Mb/s per port, 4000 Mb/s Combined	
	Connector	RJ-45		
	Cable Support	10Base-T	Categories 3, 4 or 5 UTP; up to 328 ft (100 m)	
		10/100/1000Base-TX	Category 5 or better; up to 328 ft (100 m)	
Environment-friendly Products and Approach	-	 Hewlett Packard Enterprise offers end-of-life HPE product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner. The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise equipment. 		

Summary of Changes

Date	Version History	Action	Description of Change
16-Feb-2016	From Version 27 to 28	Added	New Hard Drives offering was added to HPE Hard Drives
			section.
			High Performance Clusters section was added to the
			QuickSpecs.
		Changed	Additional Options section was revised.
		Removed	Obsolete models were removed from the Pre-configured
			Models section.
			Obsolete SKUs were removed from the QuickSpecs.
17-Dec-2015	From Version 26 to 27	Added	Smart Buy models were added to the NA version.
01-Dec-2015	From Version 25 to 26	Added	New Hard Drives offering was added to HPE Hard Drives section.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
17-Aug-2015	From Version 24 to 25	Added	New option was added to HPE Memory.
17 Aug 2015		Changed	New Solid State Drives offering was added to HPE Hard
		changed	Drives section.
01-Jun-2015	From Version 23 to 24	Added	New Hard Drives were added to Core Options.
01 501 2015		Removed	Pre-configured Models section was revised.
		Changed	Obsolete SKUs were removed from Core Options, and
		changed	Additional Options.
30-Mar-2015	From Version 22 to 23	Added	New Hard Drives were added to Core Options.
30 1101 2013		Removed	Obsolete SKUs removed from HPE Processors.
09-Feb-2015	From Version 21 to 22	Added	New Hard Drives, DirectFlow UPS, Rack and Tower G4
071002015		Added	Models, LCD8500 1U Rackmount Models and Options were
			added to the Additional Options section.
		Changed	HPE Uninterruptible Power Systems and HPE Rack Options in
		changea	Additional Options section were revised.
09-Feb-2015	From Version 20 to 21	Changed	Versioning matching with Product Bulletin
		-	
01-Dec-2014	From Version 19 to 20	Added	HPE 1.6TB 6G SATA Value Endurance SFF 2.5-in SC
			Enterprise Value 3yr Wty Solid State Drive and HPE 1.6TB 6G
			SATA Value Endurance LFF 3.5-in SC Converter Enterprise
			Value 3yr Wty Solid State Drive were added to HPE Hard
		Demonstra	Drives.
		Removed	Removed two Proactive Care Services (U6F65E and U6F66E), Foundation Care services and Proactive Care Personalized
			Support Option from HPE Care Pack Services.
01-Nov-2014	From Version 18 to 19	Changed	Service and Support section was revised.
	From Version 17 to 18	Changed Added	New Solid State Drives were added.
29-Sep-2014	FIGHT VEISION 17 TO 18	Audeu	HPE Managed Power Distribution Units (maPDU) was added
			to Additional Options.
		Changed	
		Changed	Service and Support section was revised. HPE Hard Drives was revised in Core Options section.
09-Sep-2014	From Version 16 to 17	Added	
07-26h-2014		Auded	6G SATA Hot Plug SFF VE (2.5-inch) SC EB SSD and 6G
			SATA Hot Plug SFF VE (2.5-inch) SC EV SSD hard drives
10 Aug 201/	Erom Varsian 1E to 14	Added	were added to Core Options section. New Hard Drives were added.
18-Aug-2014	From Version 15 to 16	Auded	
			HPE Remote mPDUs half height version were added.

Summary of Changes

		Changed	Core Options and Additional Options sections were revised.
10-Jun-2014	From Version 14 to 15	Added	Entry, Base and Performance processors were added to Standard Features.
			Entry and Performance Pre-configured models were added.
			Entry and Performance processors were added.
		Changed	Memory, Basic and Remote Power Distribution Units were revised.
18-Apr-2014	From Version 13 to 14	Changed	Memory, HPE Insight Software, Basic and Remote Monitoring
·		5	Power Distribution Units, and HPE Care Pack Services were revised.
31-Mar-2014	From Version 12 to 13	Changed	12G SAS High Endurance Hot Plug SFF Enterprise
			Performance Solid State Drives and 12G SAS Mainstream
			Endurance Hot Plug SFF Enterprise Mainstream Solid State
			Drives were added to Hard Drives
			HPE Computation and Graphics Accelerators was added to
			Core Options
			HPE Insight Software, Storage Controllers and HPE USB and
			SD Options were revised in Additional Options
31-Jan-2014	From Version 11 to 12	Changed	Model descriptions, Tape Backup, and HPE USB and SD
			Options were revised.
13-Dec-2013	From Version 10 to 11	Changed	HPE Insight Control including 1yr 24x7 Support ProLiant
			MI/DL/BL-bundle FIO Electronic License was added to Step 3
			in Configuration Information
			HPE SmartCache and HPE H221 PCIe 3.0 SAS Host Bus
			Adapter were added to Storage Controllers
			HPE Tape and Disk Storage Systems were added to
			Additional Options
			HPE 8GB USB EM Flash Media Kit was added to HPE USB
			and SD Options
			HPE 1.2TB 6G SAS 10k rpm SFF SC Dual Port Enterprise 3yr
			Warranty Hard Drive was added and 3G SATA MLC Hot Plug
			SFF and LFF Enterprise Mainstream Solid State Drives were
			removed from Hard Drives
			HPE Basic Power Distribution Units and HPE Remote
			Monitoring Power Distribution Unites were revised in in
			Additional Options
			HPE Power Distribution Units were removed from Additional
15-Nov-2013	From Version 9 to 10	Changed	Options Minor change made to the Core Options/ Hard Drives Section.
30-Sep-2013	From Version 8 to 9	Added	Entry and Base Processors were added
20-26h-2012		Audeu	HPE Insight Software was added to Step 3 in Configuration
			Information - Factory Integrated Models
			3G SATA MLC Hot Plug SFF and LFF Enterprise Mainstream
			Solid State Drives were added to Hard Drives
			Modular PDUs 1U/OU were added to Hard Drives
			Units
			HPE Remote Monitoring Power Distribution Units was added
			to Additional Options
			HPE Enterprise Mainstream Flash Media Kits for Memory
			Cards were added to HPE USB and SD Drives
20-Sen-2013	From Version 7 to 8	Changed	
20-Sep-2013	From Version 7 to 8	Changed	HPE Dynamic Smart Array B120i Controller in Technical

Summary of Changes

			Specifications was revised.
10-Sep-2013	From Version 6 to 7	Changed	Changes made throughout all Memory sections.
22-Aug-2013	From Version 5 to 6	Added	Added the Security section to Additional Options
19-Aug-2013	From Version 4 to 5	Changed /	Added the What's New section
		Added	Changes made in the Standard Features section
			Changes made throughout all Memory sections
			The Service and Support section was completely revised.
			Changes made throughout the Configuration Information
			section.
			Added the HPE Tape Backup section
15-Jul-2013	From Version 3 to 4	Added	HPE Disk Backup was added to Additional Options.
14-Jun-2013	From Version 2 to 3	Changed	Changes made to the Models section only.
12-Jun-2013	From Version 1 to 2	Changed	Changes made to the North America and Canada versions
			only.



<u>Sign up for updates</u>

★ Rate this document

© Copyright 2016 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

Hewlett Packard Enterprise

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

c04123183 - 14564 - Worldwide - V28 - 16-February-2016